



DSR-4460


Commercial Integrated Receiver/Decoder



A Multi-Format Digital Satellite Receiver for Cable Programmers and Operators

Highlights Include:

- Stackable 1RU chassis design
- 2 RF Inputs (L-Band)
- ASI input
- Multi-format MPEG-2/4 HD/SD processing
- Digital component video output (HD/SD-SDI) with embedded audio
- AFD support for processing proper SD output aspect ratio
- Advanced Modulation support with DVB-S QPSK, and DVB-S2 QPSK/8PSK
- DigiCipher II conditional access control
- Dolby® Digital audio processing
- VBI reinsertion for closed caption
- Quick disconnect terminals for easy installation
- DTMF cue tones for local ad insertion
- Dual ASI and Gig-E transport outputs
- Composite video and dedicated video diagnostics outputs
- 10/100 BaseT Ethernet port for SNMP and web browser monitoring and control

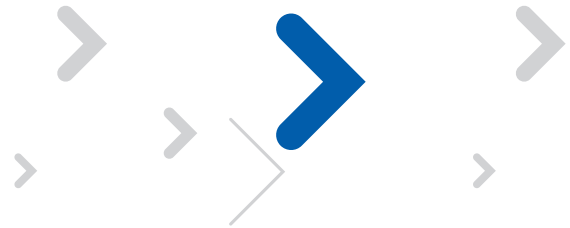


For more information regarding any of these features contact your Motorola sales representative.

The DSR-4460 Integrated Receiver/Decoder from Motorola brings revolutionary technology advances from a recognized leader in satellite program delivery. The DSR-4460 can decode a MPEG-2 or MPEG-4, HD or SD service and deliver outstanding video and audio performance via HD/SD-SDI output or analog/composite video output. Its sleek packaging design fits in a standard 19" relay rack and requires only a single rack unit of space.

The Motorola DSR-4460 comes equipped with industry standard output interfaces such as Gig-E and dual ASI outputs that enable seamless connections to headend equipment. With advanced modulation support, the DSR-4460 supports both DVB-S QPSK and DVB-S2 QPSK/8PSK.

TECHNICAL SPECIFICATIONS	
L-Band Input Input Frequency: 950 - 2150 MHz Input Impedance: 75 Ω Input Connectors: Two (2) F-type F-Connector: 16V DC min/450 mA Port-to-Port Isolation: 40 db (minimum)	
Digital Processing Modulation Modes: DC-II QPSK, DVB-S QPSK, DVB-S2 QPSK/8PSK Symbol Rates: 1 to 31.25 Msps QSPK FEC Rates: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 7/8 DVB-S2 FEC Rates: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10	
Composite Video Frequency Response (NTSC): ±0.9 dB, 1kHz - 4.2 MHz Frequency Response (PAL): ±0.9 dB, 1kHz - 4.8 MHz Signal/Noise Ratio: 57 dB (min) Differential Gain: 4.0% p-p (max) (10% to 90% APL) Difference Phase: 1.5 deg. (max) Output Impedance: 75 Ω Output Level: 1.0 V p-p ± 10%	
Audio Output: 2 stereo pair or 4 mono Output Level: ±18.0 dBu, ±1.0 dB into 600 Ω balanced load, adjustable (0 to -18 dB) Frequency Response: ±1.0 dB, 20 Hz to 20 kHz Total Harmonic Distortion: 0.4% or better at 1kHz Signal/Noise Ratio: 85 dB or better at 1 kHz RE: + 18 dBu, measured at 20 Hz to 20 kHz Isolation, L/R: 80 dB at 1 kHz Impedance: 50 Ω	
HD/SD - SDI Output Level: 800 mV, ±80 mV Output Impedance: 75 Ω Standard: SMPTE-259M, SMPTE-292 Connector: BNC	
Contact Closures Number of Closures: 4 (1 alarm) Type: Form C	
Ethernet Connectors: Two (2) RJ-45 Formats: 10/100BaseT and 1000BaseT	
ASI Output (2) / Input (1) Format: Asynchronous serial interface Transmission: Data byte and packet Standard: CENELEC EN 50083-9 Connector: BNC	
Cue Tones Signal Type: Differential output Signal Level: 0 dBm, ± 3 dB (600 Ω)/tone Connector: Quick disconnect terminal	
Physical Width: 18.9" (48cm) Depth: 20.5" (52.1cm) Height: 1.65" (4.2cm) Weight: 12 lb (5.5kg) approx Power Input: 95-240 VAC, 50-60Hz, 60 W max Operating Temperature: 0 to 50C Humidity: 95%, relative maximum Display: 2 line, 40 character LCD	
Other Limited Warranty: One year Compliance: UL/CE listed/approved, FCC part 15	

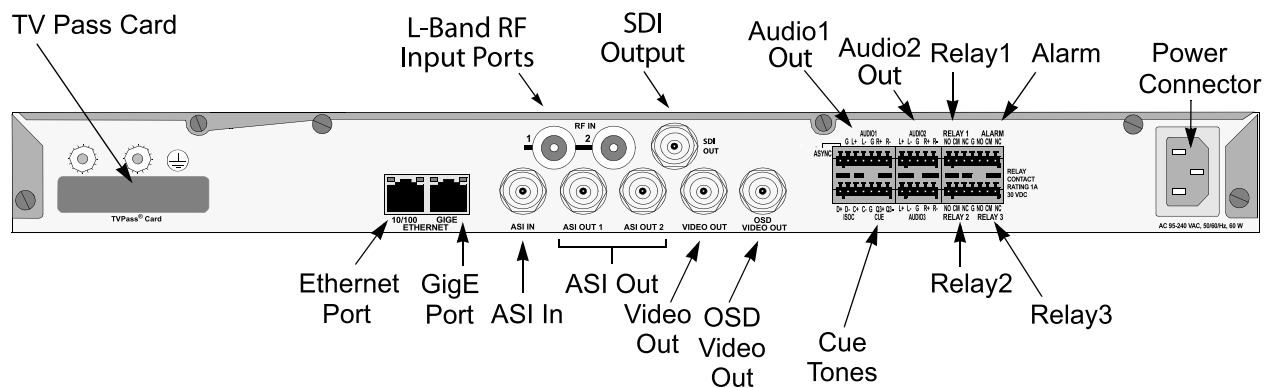

Motorola, Inc. Home & Networks Mobility
6450 Sequence Drive, San Diego, California 92121 U.S.A.
www.motorola.com/business 858-578-2222