


data sheet

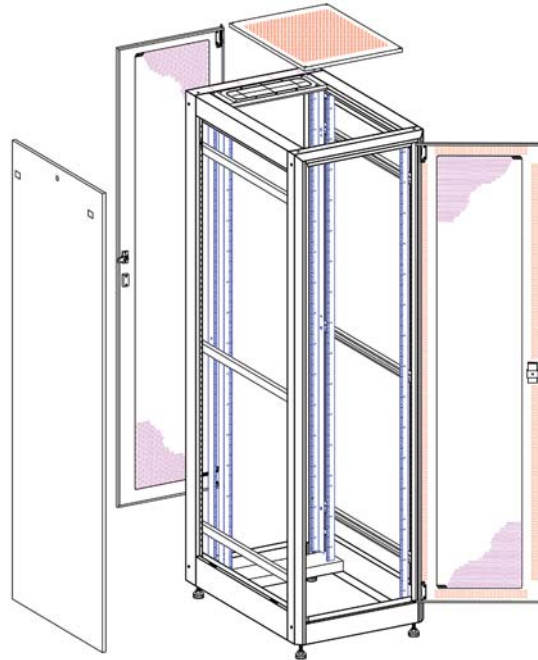

Description

Designed to rack mount computer equipment in accordance with EIA-STANDARD-310 within the footprint of a traditional raised floor access tile. The welded construction is designed to protect, organize & secure computer equipment.

Applications

Indoor Use Computer Room, Data Center, Internet Data Center, Server Farm, Colocation, Headend, POP.

Part #	XUS 78	XUS 84
Height	78"	84"
Width	24"	24"
Depth	36"	36"
Mounting	19"	19"
Rack Spaces	42U	45U
Door Opening	71.75"	77.75"
Usable Depth	33.75"	33.75"
Weight Cap w/casters	730#	730#
Weight Cap w/o casters	1000#	1000#
Weight	350#	370#
Color	Beige, Black	



ULTRA SERVER

Construction

Frame	16 gauge welded construction, casters, levelers and bolt down provision, cable access top, bottom & rear w/grommet, powder coat textured finish grounding kit.
Top	Interchangeable 14.25"x4" cable access, perforated, optional solid, 550 CFM Fan, 320 CFM Fan.
Mounting Uprights	12 gauge painted, square holes, EIA spacing w/bag of 50 M6 clip nuts & hdw., optional 10-32 clip & hdw.
Front Door	16 gauge steel welded construction, flush mount slam latch w/lock, reversible hinge, perforated, optional solid, w/stiffner, Tempered Safety Glass Vented.
Rear Door	18 gauge steel welded construction, flush mount slam latch w/lock, reversible hinge, perforated, optional solid w/stiffner.
Side Panels	18 gauge steel welded construction, flush quick release fastener, security lock.

Optional Accessories

Tops	19" Fan Tray 720 CFM	10" Diameter Fan 550 CFM	4" Diameter Fan 320 CFM	Solid	Vented
Front Doors	Glass vented w/ flush lock	Perforated w/ flush lock	Solid		
Rear Doors	Solid w/ flush lock	Vented w/ flush lock	Glass Vented		
Side Panels	Solid	Vented			
Power Strips	4' 16 outlet	2' 8 outlet	19" rack mount	19" rack mount 6 outlet surge	



2001 N. Main Street • Washington, PA 15301

Phone: 1-800-793-2954 • 724-228-7373 • Fax: 724-228-3920

Sales e-mail: salesdep@xmark-cdt.com • Web Site: www.metalenclosures.com