


Trunk and Distribution Adapters, Housing to Housing Adapter

Sealed locking rotational

CORNING



Part Number: G-KS-KS-MLKG-T

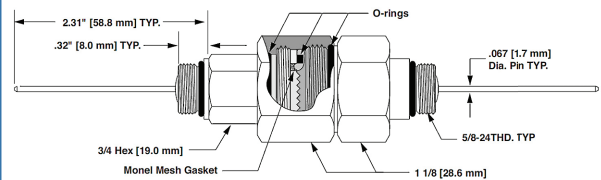

Part Number: G-KS-KS-MLKG-T

CORNING

Trunk and Distribution Adapters, Housing to Housing Adapter

Sealed locking rotational

CORNING

Specifications

General Specifications

Environment	Outdoor
-------------	---------

Temperature Range

Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Design - Hardware

Interface type	KS Male to KS Male
Body	Straight

Mechanical Characteristics

Frequency Range	0 GHz to 3 GHz
-----------------	----------------

Electrical characteristics (at 20°C)

Return Loss (cable dependent)	-30 dB
-------------------------------	--------

Transmission

Shielding effectiveness	-130 dB
-------------------------	---------

Ordering Information

Part Number	G-KS-KS-MLKG-T
Product Description	Trunk and Distribution Adapters, housing to housing adapter, sealed locking rotational
EAN Code	4056418765853

Trunk and Distribution Adapters, Housing to Housing Adapter

Locking rotational

CORNING



Trunk and Distribution Adapters, Housing to Housing Adapter

Locking rotational



Specifications

General Specifications

Environment	Outdoor
-------------	---------

Temperature Range

Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Design - Hardware

Interface type	KS Male to KS Male
Body	Straight

Mechanical Characteristics

Frequency Range	0 GHz to 3 GHz
-----------------	----------------

Electrical characteristics (at 20°C)

Return Loss (cable dependent)	-30 dB
-------------------------------	--------

Transmission

Shielding effectiveness	-130 dB
-------------------------	---------


Ordering Information

Part Number	G-KS-KS-MLK-T
Product Description	Trunk and Distribution Adapters, housing to housing adapter, locking rotational
EAN Code	4056418765846

Trunk and Distribution Adapters, Housing to Housing Adapter

Rotational

CORNING

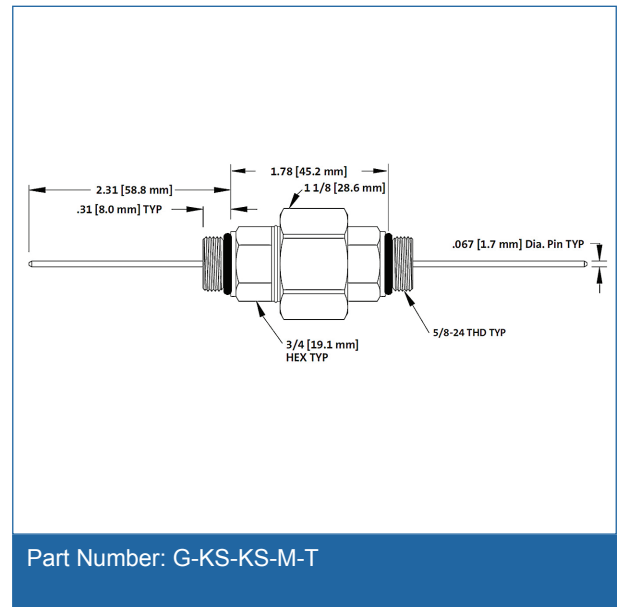

Specifications

General Specifications

Environment	Outdoor
-------------	---------

Temperature Range

Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Design - Hardware

Interface type	KS Male to KS Male
Body	Straight

Mechanical Characteristics

Frequency Range	0 GHz to 3 GHz
-----------------	----------------

Trunk and Distribution Adapters, Housing to Housing Adapter

Rotational



Electrical characteristics (at 20°C)

Return Loss (cable dependent)	-30 dB
-------------------------------	--------

Transmission

Shielding effectiveness	-130 dB
-------------------------	---------

Ordering Information

Part Number	G-KS-KS-M-T
Product Description	Trunk and Distribution Adapters, housing to housing adapter, rotational
EAN Code	4056418765839

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA

800-528-5567 • FAX: 602-344-6358 • International: +1-623-245-1050 • www.corning.com/opcomm

Page 2 | Revision date 2016-03-03

A complete listing of the trademarks of Corning Optical Communications RF is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001

