



# BUCK ARTICULATOR™ by Buckingham

Meets ASTM F887 Electric Arc Performance Requirements  
Meets ANSI Z359.11




## Model 69A9D8G7H00

To Order with Chafes behind quick connect buckles use **Model 69A9D8G7H00Q1**  
For CSA approved, use **Model C69A9D8G7H00**

The Buck-Articulator™ is a 'Y' style harness that articulates in three places making it ideal for anyone that requires the user to bend, reach, twist, and climb at heights, making it perfect for fall arrest, work positioning and Rescue. The Buck-Articulator™ harness floats freely through the waist straps, while the body belt stays in position allowing for freedom of movement. This harness can be used by itself or the user can easily attach a lineman's body belt. The Buckingham Mobility™ belts, models 20192M and 20182M have been favored with the benefit of allowing greater freedom of the lineman to lift their legs when climbing poles, towers or a ladder. The Buck-Articulator™ has two 5000 lbs rated dee rings in the front of harness, one at the sternum (better for rescue), one at the abdomen, and a 5000 lb. rated nylon loop dorsal attachment that can be used for fall arrest or rescue. Leg straps feature using 4000 lb. rated, color coded quick connect buckles to make donning quick and easy. The Buck-Articulator™ meets the requirements of ANSI Z359 and ASTM-F887.

The Buck-Articulator™ was developed while working with Fortis, in Alberta, Canada. Buckingham listened to concerns and worked together to developed a harness ideal for anyone who has to eliminate restriction typically found in traditional harnesses.

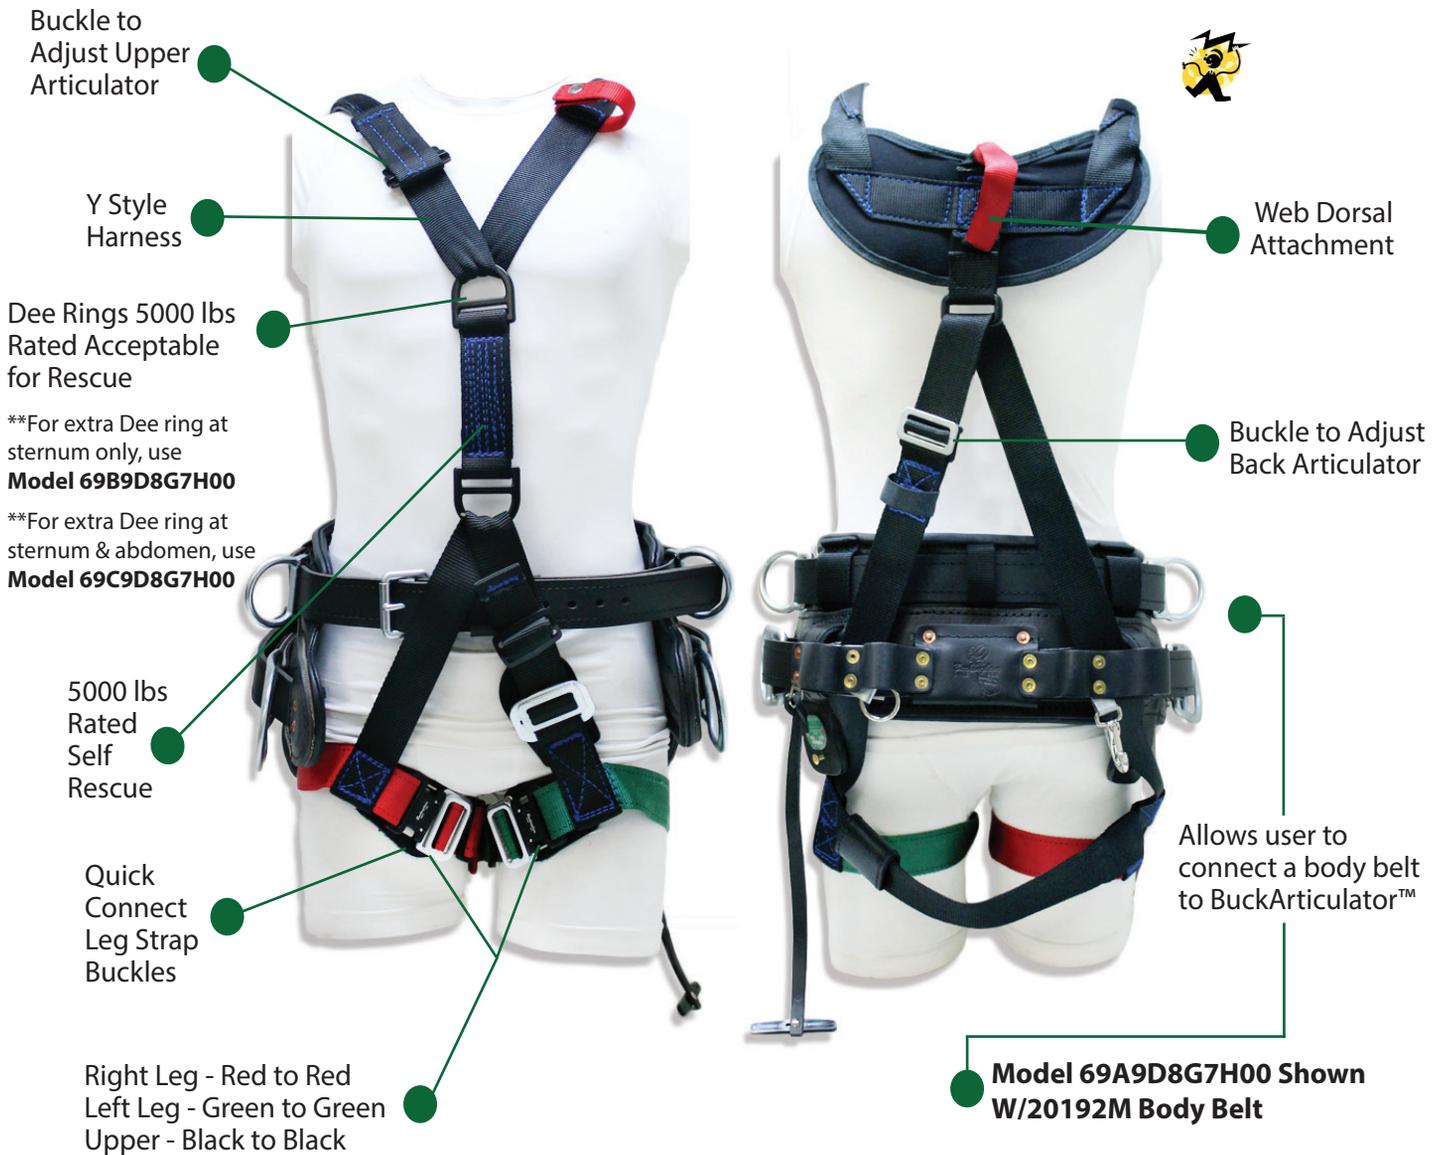

Buckingham Manufacturing Company, Inc.  
1-11 Travis Avenue  
P.O. Box 1690  
Binghamton, NY 13904



Tel: (607) 773-2400

Fax: (607) 773-2425

Email: [sales@buckinghammfg.com](mailto:sales@buckinghammfg.com)

[www.buckinghammfg.com](http://www.buckinghammfg.com)