


LUNAR

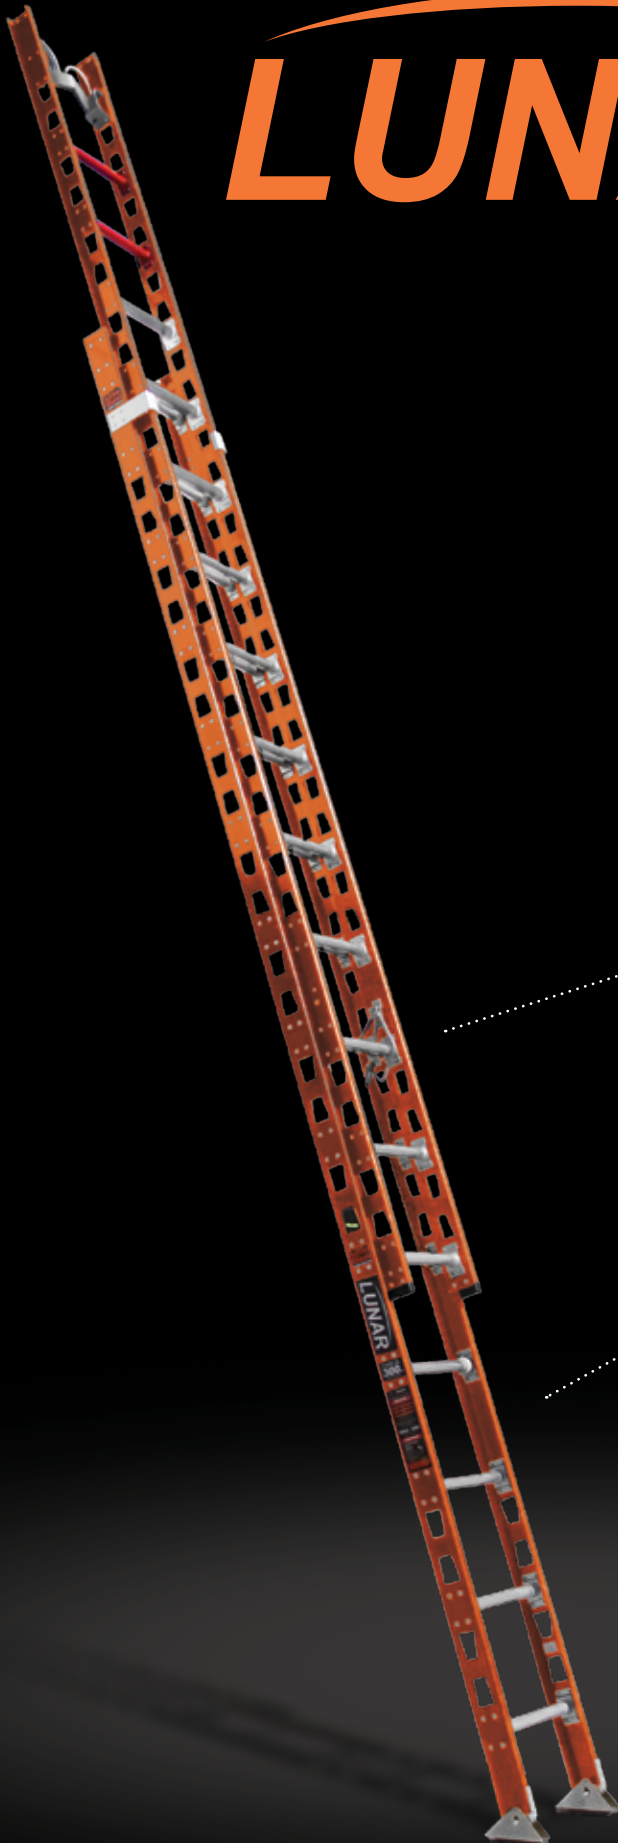

LITEWAVE TECHNOLOGY

Reduces ladder weight up to 25%
over ordinary extension ladders

Non-conductive, fade-resistant fiberglass composite for industrial and electrical applications

Lightest ANSI industrial-rated fiberglass extension ladders in the world


**Little
Giant**
Ladder Systems

CLIMB ON



The lightest weight fiberglass industrial-rated ladder in the world.

LUNAR

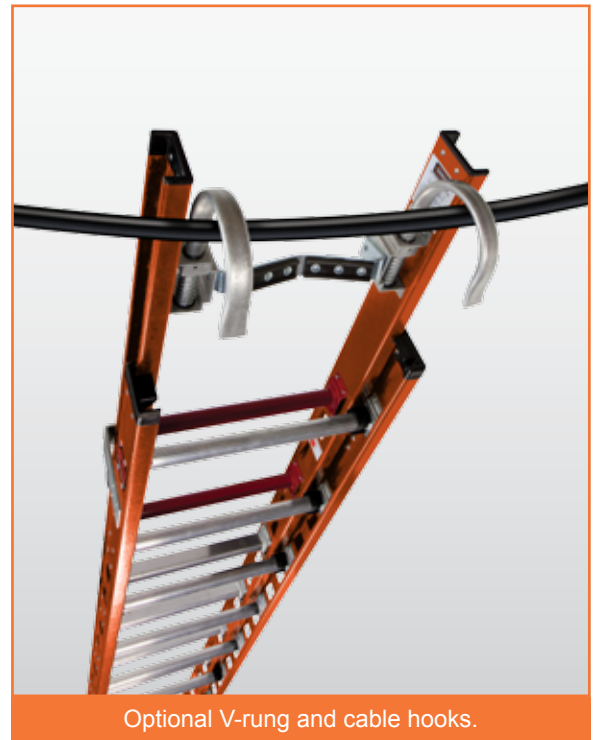

Optional V-rung and cable hooks.

1-YEAR WARRANTY / TYPE IA 300 LBS / TYPE IAA 375 LBS

Part Number	Model	ANSI Rating	Storage Height	Storage Width	Storage Depth	Round Rung Width	D-Rung Width	Side Rail Width
15622-009	20'	Type IA - 300	10' 9"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15623-009	24'	Type IA - 300	12' 7"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15610-009	28'	Type IA - 300	15' 5"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15626-009	20'	Type IAA - 375	10' 9"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15627-009	24'	Type IAA - 375	12' 7"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15628-009	28'	Type IAA - 375	15' 5"	17-1/2"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15629-009	32'	Type IAA - 375	16' 8"	18-1/4"	6-1/4"	1-1/4"	1-5/8"	3-5/16"

Part Number	Shoe Width	Rope Diameter	Highest Standing Level	Extension Max Height	Max Reach*	Fly Section Width	Weight
15622-009	1-1/2"	3/8"	13' 3"	17'	19' 9"	15-3/4"	39.5 lbs
15623-009	1-1/2"	3/8"	17' 3"	21'	23' 10"	15-3/4"	46 lbs
15610-009	1-1/2"	3/8"	21'	25'	27' 6"	15-3/4"	50 lbs
15626-009	1-1/2"	3/8"	13' 3"	17'	19' 9"	15-3/4"	40.5 lbs
15627-009	1-1/2"	3/8"	17' 3"	21'	23' 10"	15-3/4"	47 lbs
15628-009	1-1/2"	3/8"	21'	25'	27' 6"	15-3/4"	51 lbs
15629-009	1-1/2"	3/8"	25' 1"	29'	31' 7"	16-3/4"	68 lbs

*A 5'6" person with a 12" reach.