

#### General Description:

6 Series, Quad-shield, 60/40% Braid, Footage Marked

Box Package

**Center Conductor:** Copper covered steel

**Nominal Diameter:** 0.040" (1.02 mm)

**Dielectric:** Closed cell foamed polyethylene

**Nominal Diameter over Dielectric:** 0.180" (4.57 mm)

#### Shield:

**1st Shield:** APA laminated tape bonded to dielectric

**Nominal Diameter over Tape:** 0.188" (4.78 mm)


**2nd Shield:** 34 AWG aluminum braid wire; 60% coverage

**3rd Shield:** APA laminated tape

**4th Shield:** 34 AWG aluminum braid wire; 40% coverage

**Jacket:** Black PVC

**Nominal Diameter over Jacket:** 0.297" (7.54 mm)

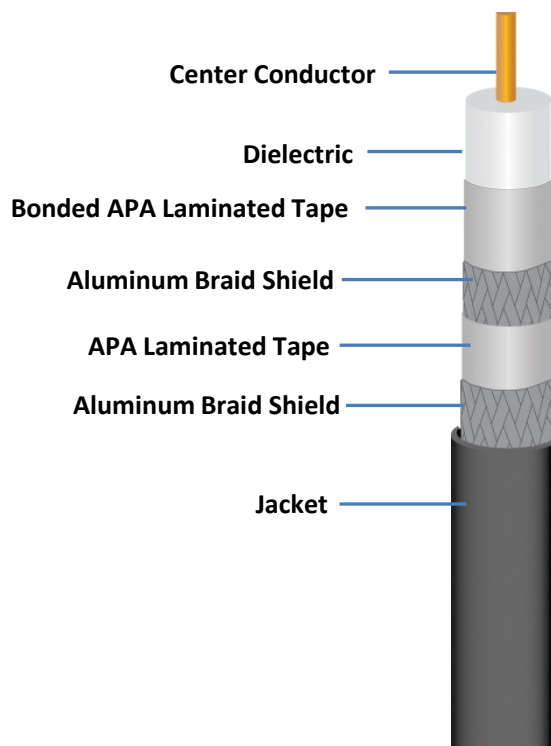

Frequency (MHz)	Maximum (dB/100ft)	Maximum (dB/100 m)
5	0.58	1.9
55	1.55	5.09
211	3.00	9.84
250	3.20	10.5
300	3.50	11.48
350	3.80	12.47
400	4.12	13.52
450	4.37	14.34
500	4.63	15.19
550	4.86	15.94
600	5.08	16.67
750	5.65	18.54
870	6.10	20.01
1000	6.54	21.46

**NEC Rated:** None

#### Electrical Properties:

**Impedance:** 75 +/- 2.5 Ohms

**Velocity Propagation:** 85% Nominal

**Cable Length Per Box:** 1,000 ft (305 m)

**Shipping Weight:** 38lbs/1,000 ft

**Packaging:** 13.9"x13.9"x13.4" (35.3x35.3x34 cm)



Unless otherwise specified, dimensions, material, electrical and mechanical specifications shall comply with ANSI SCTE 74

\*Cable image for reference only. Please refer to jacket description for color.

