

# SignalTight™ Drop Jumpers

## The continuity solution




### Perfect for Self-Install Kits

Digital services are seriously impacted by loose connectors

**SignalTight™ Drop Jumpers minimize the number of self-installs that become truck rolls**

Achieves signal transmission approaching that of a fully-tightened connector, even if left loose

- Maintains ground continuity even when very loose
- SimpleX® sleeves provide better grip which results in more successful subscriber installs
- PPC Perfect Flex™ coaxial cable is a world-class cable with future-proof features

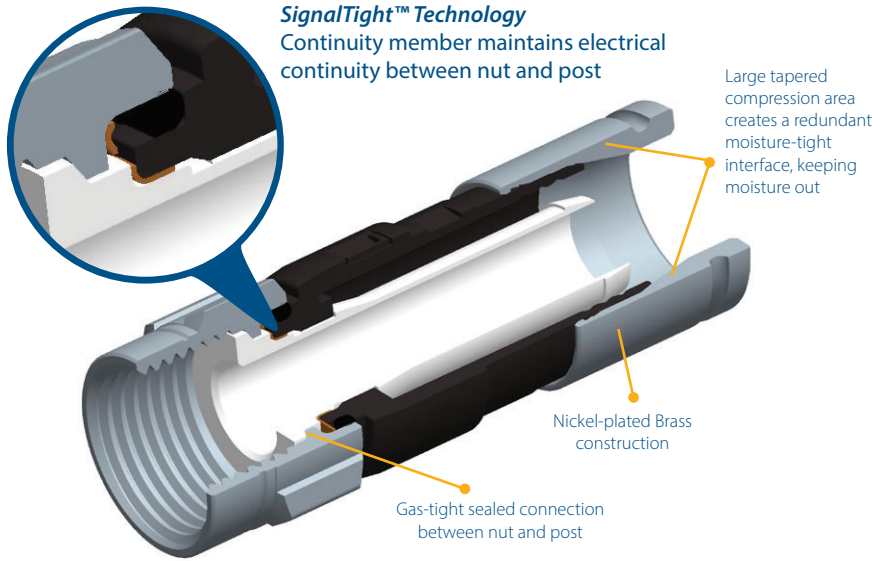

### Product Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum -30 dB to 3 GHz
Insertion Loss	Less than .10 dB to 3 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-40° C to 60° C)
Cable Retention (Trishield)	70 lbs (20.41 kg) minimum

*Meets or Exceeds all SCTE Specifications*

Part #	Description
JPLUS6T36WSE	SignalTight™ Jumper, 6 series, tri-shield, 77% braid, white, 36" with SimpleX® torque sleeve
JPLUS6T72WSE	SignalTight™ Jumper, 6 series, tri-shield, 77% braid, white, 72" with SimpleX® torque sleeve
JPLUS6T120WSE	SignalTight™ Jumper, 6 series, tri-shield, 77% braid, white, 120" with SimpleX® torque sleeve
JPLUS6T180WSE	SignalTight™ Jumper, 6 series, tri-shield, 77% braid, white, 180" with SimpleX® torque sleeve
JPLUS6T360WSE	SignalTight™ Jumper, 6 series, tri-shield, 77% braid, white, 360" with SimpleX® torque sleeve