


## 90 Degree Socket Contact Adapters


### Socket Contact Adapters

- Beryllium copper socket contact design accepts pin diameter from .065 to .075 in. [1.65 to 1.90 mm].
- Bright acid tin plated brass pin.
- AC power rating: 15 amps continuous.
- Return loss: >30 db to 1 GHz.
- KS male and KS female ports meet SCTE interface practice standards.
- Body manufactured from ASTM 6262 aluminum alloy with chromate conversion coating.

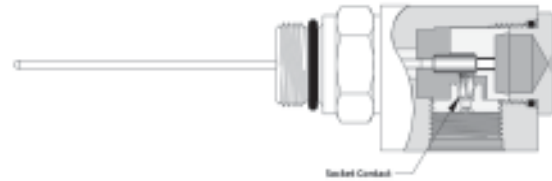


### 90° Socket

- GL-90-SC-T ( $B$ ) = 1.00  
Accepts .065 [1.7mm] thru .075 [1.9mm] pin dia.

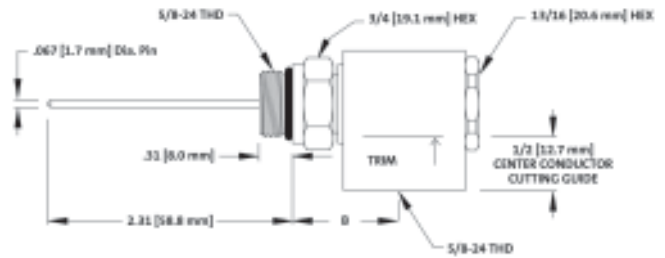

### 90° Socket Ext.

- GL-90-SC-w/1.5-T ( $B$ ) = 2.46
  - GL-90-SC-w/3-T ( $B$ ) = 3.96
  - GL-90-SC-w/4.5-T ( $B$ ) = 5.46
  - GL-90-SC-w/6-T ( $B$ ) = 6.96
  - GL-90-SC-w/9-T ( $B$ ) = 9.96
- Accepts .065 [1.7mm] thru .075 [1.9mm] pin dia.

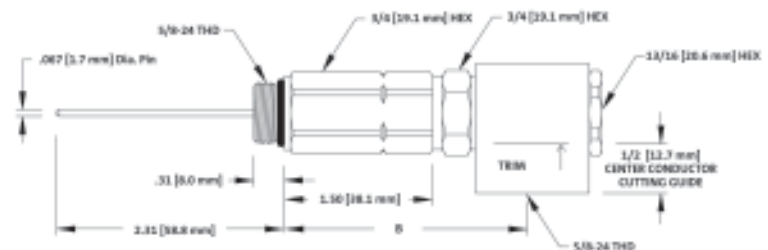

### 90° Socket swivel

- GL-90-SC-S-T ( $B$ ) = 1.29  
Accepts .065 [1.7mm] thru .075 [1.9mm] pin dia.

