


FITTINGS & ACCESSORIES

QUADPLEX DUCT PLUGS

Multi-Port Sealing Ducts

Quadplex duct plugs are split plugs for sealing around, organizing, and supporting up to four subducts, pipes, or cables. The plugs are designed for use in round openings such as conduits, conduit fittings and core-drilled wall penetrations. Effective long-term water-tight and air-tight seals, these products also prevent mud, backfill, and slurry from entering handholes, manholes, and buildings during the construction process.

The service life of cable, splices, manhole hardware and electronics can be increased when contact with moisture is reduced. Flooded underground structures are accessed more quickly when they are isolated from the ingress of water, mud, and slurry.

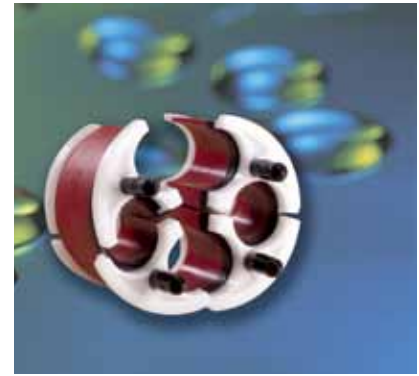

Quadplex Duct Plugs Features

- Split design for retrofitting without disassembly
- Anchors and organizes subducts or multiple duct systems
- Eliminates duct-edge abrasion to cables
- Expandable gasket allows for expansion and contraction of cables or subducts without leakage
- Excellent for supporting cables at the tops of risers

Part Number	Size	Duct I.D. Range		Cable or Duct O.D. Range	
		inches	mm	inches	mm
35Q118H	3.50	3.43 - 3.58	87.1 - 90.9	1.10 - 1.18	27.9 - 30.0
35Q126SG	3.50	3.50 - 3.62	88.9 - 91.9	1.14 - 1.26	29.0 - 32.0
35Q126SG-PU	3.50	3.50 - 3.62	88.9 - 91.9	1.14 - 1.26	29.0 - 32.0
36Q136HG	3.60	3.62 - 3.81	91.9 - 96.8	1.19 - 1.36	30.2 - 34.5
36Q126S	3.75	3.70 - 3.81	94.0 - 96.8	1.14 - 1.26	29.0 - 32.0
36Q126SG	3.75	3.70 - 3.81	94.0 - 96.8	1.14 - 1.26	29.0 - 32.0
36Q136SG	3.75	3.70 - 3.81	94.0 - 96.8	1.19 - 1.36	30.2 - 34.5
40Q136H	3.80	3.86 - 4.00	98.0 - 101.6	1.19 - 1.36	30.2 - 34.5
40Q136S	4.00	4.02 - 4.17	102.1 - 105.9	1.19 - 1.36	30.2 - 34.5
40Q136SG	4.00	4.02 - 4.17	102.1 - 105.9	1.19 - 1.36	30.2 - 34.5
40Q142S	4.00	4.02 - 4.17	102.1 - 105.9	1.36 - 1.42	34.5 - 36.1
40Q142SG	4.00	4.02 - 4.17	102.1 - 105.9	1.36 - 1.42	34.5 - 36.1
40Q136A	4.20	4.19 - 4.35	106.4 - 110.5	1.19 - 1.36	30.2 - 34.5
40Q136AG	4.20	4.19 - 4.35	106.4 - 110.5	1.19 - 1.36	30.2 - 34.5
40Q142AG	4.20	4.19 - 4.35	106.4 - 110.5	1.30 - 1.42	33.0 - 36.1
40Q157AG	4.20	4.19 - 4.35	106.4 - 110.5	1.42 - 1.57	36.1 - 39.8
40Q160AG	4.20	4.19 - 4.35	106.4 - 110.5	1.48 - 1.60	37.6 - 40.6
50Q142HG	4.80	4.88 - 5.00	124.0 - 127.0	1.30 - 1.42	33.0 - 36.1
50Q167HG	4.80	4.88 - 5.00	124.0 - 127.0	1.53 - 1.67	38.9 - 42.4
50Q192HG	4.80	4.88 - 5.00	124.0 - 127.0	1.77 - 1.92	45.0 - 48.8
50Q136SG	5.00	5.04 - 5.28	128.0 - 134.1	1.19 - 1.36	30.2 - 34.5
50Q142SG	5.00	5.04 - 5.28	128.0 - 134.1	1.30 - 1.42	33.0 - 36.1
50Q150SG	5.00	5.04 - 5.28	128.0 - 134.1	1.36 - 1.50	34.5 - 38.1
50Q167S	5.00	5.04 - 5.28	128.0 - 134.1	1.50 - 1.67	38.1 - 42.4
50Q177SG	5.00	5.04 - 5.28	128.0 - 134.1	1.67 - 1.77	42.4 - 45.0
50Q192S	5.00	5.04 - 5.28	128.0 - 134.1	1.77 - 1.92	45.0 - 48.8
50Q192SG	5.00	5.04 - 5.28	128.0 - 134.1	1.77 - 1.92	45.0 - 48.8
60Q142HG	5.80	5.82 - 5.98	147.8 - 151.9	1.30 - 1.42	33.0 - 36.1
60Q167HG	5.80	5.82 - 5.98	147.8 - 151.9	1.53 - 1.67	38.9 - 42.4
60Q192HG	5.80	5.82 - 5.98	147.8 - 151.9	1.81 - 1.92	46.0 - 48.8
60Q136SG	6.00	6.02 - 6.33	152.9 - 160.8	1.19 - 1.36	30.2 - 34.5
60Q142SG	6.00	6.02 - 6.33	152.9 - 160.8	1.30 - 1.42	33.0 - 36.1
60Q150SG	6.00	6.02 - 6.33	152.9 - 160.8	1.36 - 1.50	34.5 - 38.1
60Q167SG	6.00	6.02 - 6.33	152.9 - 160.8	1.50 - 1.67	38.1 - 42.4
60Q177SG	6.00	6.02 - 6.33	152.9 - 160.8	1.67 - 1.77	42.4 - 45.0
60Q192S	6.00	6.02 - 6.33	152.9 - 160.8	1.77 - 1.92	45.0 - 48.8
60Q192SG	6.00	6.02 - 6.33	152.9 - 160.8	1.77 - 1.92	45.0 - 48.8
60Q196SG	6.00	6.02 - 6.33	152.9 - 160.8	1.84 - 1.96	47.0 - 49.8
60Q216SG	6.00	6.02 - 6.33	152.9 - 160.8	1.96 - 2.16	49.8 - 54.9
60Q220S	6.00	6.02 - 6.33	152.9 - 160.8	1.96 - 2.20	49.8 - 55.8
80Q238SG	8.00	7.76 - 7.90	197.1 - 200.7	2.16 - 2.38	54.9 - 60.4

QUADPLEX DUCT PLUGS CONTINUED

Part Number	Size	Duct I.D. Range		Cable or Duct O.D. Range	
		inches	mm	inches	mm
Custom Quadplex					
40Q136S-R	4.00	4.02 - 4.17	102.1 - 105.9	1.19 - 1.36	30.2 - 34.5
40F136S	4.00	3.96 - 4.13	100.6 - 104.9	1.22 - 1.36	31.0 - 34.5
40F136SG	4.00	3.96 - 4.13	100.6 - 104.9	1.22 - 1.36	31.0 - 34.5
40F142SG	4.00	3.96 - 4.13	100.6 - 104.9	1.30 - 1.42	33.0 - 36.1
40F142S	4.00	3.96 - 4.13	100.6 - 104.9	1.30 - 1.42	33.0 - 36.1
40Q160AG-1	4.15	4.19 - 4.35	106.4 - 110.5	(2x)1.48 - 1.60 (2x)1.10 - 1.26	37.6 - 40.6 27.9 - 32.0
40Q160SG-1	4.00	4.02 - 4.17	102.1 - 105.9	(2x)1.48 - 1.60 (2x)1.10 - 1.26	37.6 - 40.6 27.9 - 32.0
40Q167SG-1	4.00	4.02 - 4.17	102.1 - 105.9	(2x)1.56 - 1.67 (2x)1.24 - 1.36	39.6 - 42.4 31.5 - 34.5
40Q169SG-1	4.00	4.02 - 4.17	102.1 - 105.9	(2x)1.59 - 1.69 (2x)1.24 - 1.36	40.4 - 42.9 31.5 - 34.5
45Q160SG-1	4.50	4.61 - 4.80	117.1 - 121.9	(2x)1.48 - 1.60 (2x)1.14 - 1.26	(2x) 37.6 - 40.5 (2x) 29.0 - 32.0

BUSHING SLEEVES

Installation Accessories for Duct Sealing Devices

Designed to adapt Simplex, Triplex, or Quadplex plugs' hole sizes to different cable or subduct sealing ranges, Bushing Sleeves allow installers to customize our duct sealing product range to project-specific needs.

When cables of different sizes occupy the same conduit, Bushing Sleeves, rather than expensive custom plugs, solve the problem.



Part Number	Size inches (mm)	Hole Diameter inches (mm)
070-SET1	0.70 (17.8)	SET
090-SET1	0.90 (22.9)	SET
110JMB051-2	1.10 (27.9)	0.51 x 2 (13.0 x 2)
110-SET1	1.10 (27.9)	SET
126JMB038	1.26 (32.0)	0.38 (9.7)
126JMB047	1.26 (32.0)	0.47 (11.9)
126JMB055	1.26 (32.0)	0.55 (14.0)
126JMB063	1.26 (32.0)	0.63 (16.0)
126JMB075	1.26 (32.0)	0.75 (19.1)
126JMB087	1.26 (32.0)	0.87 (22.1)
126JMB094	1.26 (32.0)	0.94 (23.9)
126JMB102	1.26 (32.0)	1.02 (25.9)
126JMB110	1.26 (32.0)	1.10 (27.9)
136JMB026/7	1.36 (34.5)	0.26 X 7 (6.6 x 7)
136JMB038	1.36 (34.5)	0.38 (9.7)
136JMB0407H	1.36 (34.5)	0.40 X 7 (10.2 x 7)
136JMB043-3	1.36 (34.5)	0.43 x 3 (10.9 x 3)
136JMB047	1.36 (34.5)	0.47 (11.9)
136JMB055	1.36 (34.5)	0.55 (14.0)
136JMB063	1.36 (34.5)	0.63 (16.0)
136JMB063/2	1.36 (34.5)	0.63 x 2 (16.0 x 2)
136JMB075	1.36 (34.5)	0.75 (19.1)