

ALTOS® All-Dielectric Gel-Free Cables

CORNING

Features and Benefits

Fully waterblocked loose tube, gel-free design

Simple access and no clean up

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

All-dielectric cable construction

Requires no grounding or bonding

Available in 62.5 µm, 50 µm, single-mode (including bend-insensitive and non-zero dispersion-shifted (NZ-DSF) fiber options) and hybrid versions


Ready for any application including Gigabit Ethernet and 10 Gigabit Ethernet

Corning ALTOS® all-dielectric gel-free cables are designed for outdoor and limited indoor use for campus backbones in lashed aerial and duct installations. The loose tube gel-free design is fully waterblocked using craft-friendly, water-swellaable materials, which means cable access is simple and no clean up is required. The flexible craft-friendly buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to strip.


Standards

Common Installations	Outdoor lashed aerial and duct; indoor when installed according to National Electrical Code® (NEC®) Article 770
----------------------	---

Design and Test Criteria	ANSI/ICEA S-87-640 Telcordia GR-20 RDUP PE-90
--------------------------	---

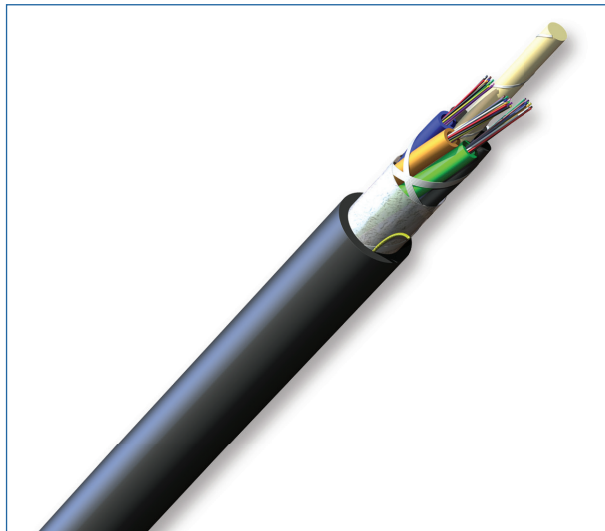

ALTOS All-Dielectric, Gel-Free Cables, 36 Fibers
| Photo PIM2426


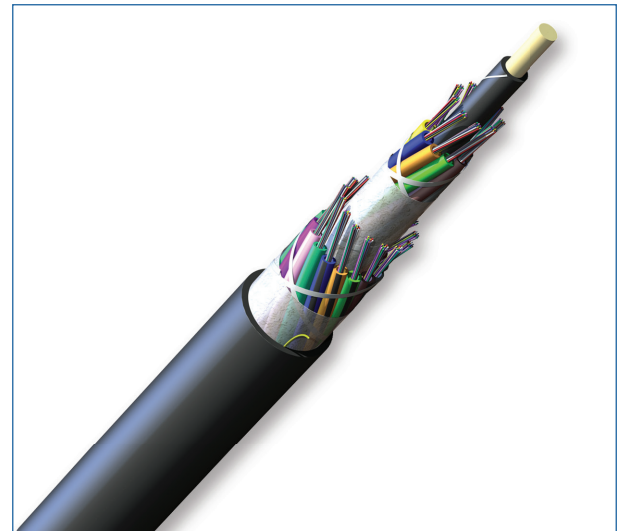


ALTOS All-Dielectric, Gel-Free Cables, 288 Fibers
| Photo PIM2440

CORNING

ALTOS® All-Dielectric Gel-Free Cables

CORNING

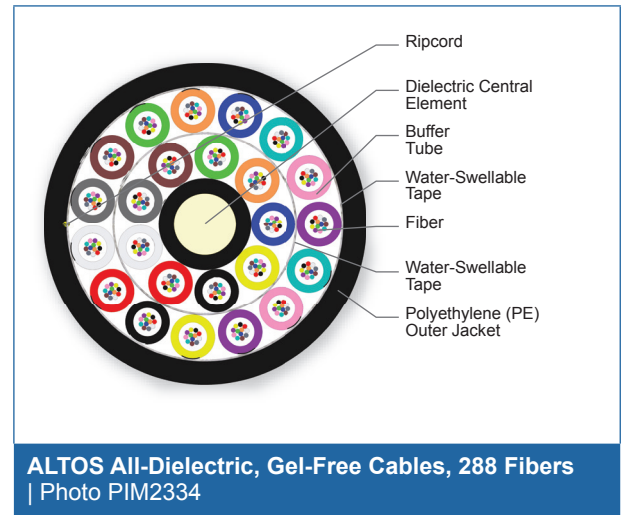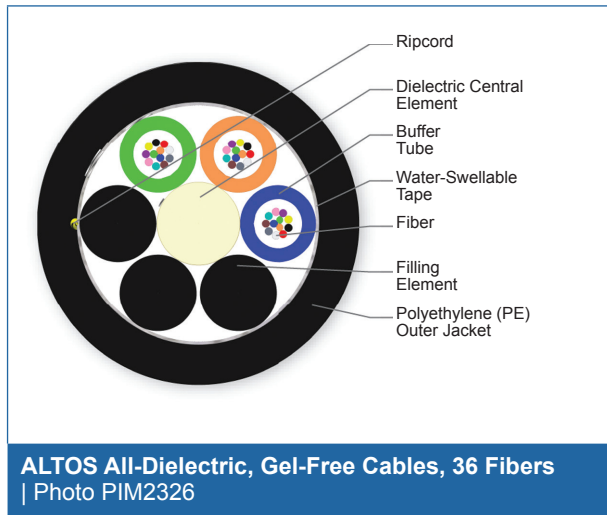

Specifications

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

* Note: Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)

Fiber Count	Maximum Fibers per Tube	Number of Tube Positions	Number of Active Tubes	Weight	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation
2 - 72	12	6	1 - 6	73 kg/km (49 lb/1000 ft)	10.5 mm (0.41 in)	158 mm (6.2 in)	105 mm (4.1 in)
84 - 96	12	8	7 - 8	98 kg/km (66 lb/1000 ft)	12.2 mm (0.48 in)	183 mm (7.2 in)	122 mm (4.8 in)
108 - 144	12	12	9 - 12	162 kg/km (109 lb/1000 ft)	15.8 mm (0.62 in)	237 mm (9.3 in)	158 mm (6.2 in)
156 - 216	12	18	13 - 18	147 kg/km (99 lb/1000 ft)	16 mm (0.63 in)	240 mm (9.4 in)	160 mm (6.3 in)
228 - 288	12	24	19 - 24	196 kg/km (131 lb/1000 ft)	18.2 mm (0.72 in)	273 mm (10.7 in)	182 mm (7.2 in)

CORNING

ALTOS® All-Dielectric Gel-Free Cables

CORNING

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Transmission Performance

Multimode				
Fiber Core Diameter (µm)	62.5	50	50	50
Fiber Category	OM1	OM2	OM3	OM4
Fiber Code	K	T	T	T
Performance Option Code	30	31	80	90
Wavelengths (nm)	850/1300	850/1300	850/1300	850/1300
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0	3.0/1.0	3.0/1.0
Serial 1 Gigabit Ethernet (m)	300/550	750/500	1000/600	1100/600
Serial 10 Gigabit Ethernet (m)	33/-	150/-	300/-	550/-
Min. Overfilled Launch (OFL) Bandwidth (MHz*km)	200/500	700/500	1500/500	3500/500
Minimum Effective Modal Bandwidth (EMB) (MHz*km)	220/-	950/-	2000/-	4700/-

CORNING

ALTOS® All-Dielectric Gel-Free Cables



Single-mode					
Fiber Name	SMF-28e+® LL	SMF-28® Ultra fiber**	Single-mode (OS2)	Single-mode (OS2)	LEAF® fiber
Fiber Category	G.652.D	G.652.D/G.657.A1	G.652.D	G.652.D	G.655
Fiber Code	L	Z	E	E	F
Performance Option Code	22	22	00	01	01
Wavelengths (nm)	1310/1383/1550	1310/1383/1550	1310/1383/1550	1310/1383/1550	1310/1383/1550
Maximum Attenuation (dB/km)	0.34/0.34/0.22	0.34/0.34/0.22	0.35/0.35/0.25	0.4/0.4/0.3	-/-/0.25
Typical Attenuation* (dB/km)	0.32/0.32/0.18	0.32/0.32/0.18	-	-	-/-/0.19
Fiber Name	SMF-28® ULL				
Fiber Category	G.652				
Fiber Code	P				
Performance Option Code	19				
Wavelengths (nm)	1310/1383/1550				
Maximum Attenuation (dB/km)	0.33/-/0.19				
Typical Attenuation* (dB/km)	0.31/-/0.17				

* For more information on typical attenuation please see the Corning whitepaper at http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_rl/LAN-1863-AEN.pdf


** SMF-28® Ultra fiber delivers up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.



ALTOS® All-Dielectric Gel-Free Cables

CORNING

Ordering Information | Note: Contact Customer Care at 1-800-743-2675 for other options.

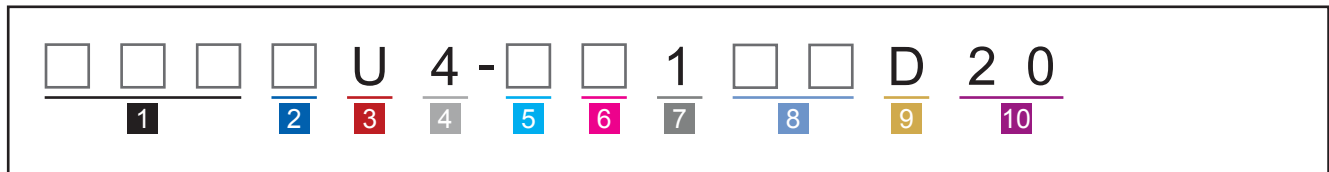

1 Select fiber count.
Standard offerings:
002-288

2 Select fiber code.
K = 62.5 µm multimode (OM1)
T = 50 µm multimode (OM2/OM3/OM4)
E = Single-mode (G.652.D)
L = Single-mode (G.652.D) SMF-28e+® LL
Z = Single-mode (G.652.D/G.657.A1) SMF-28® Ultra fiber
P = Single-mode (G.652) SMF-28® ULL
F = Single-mode (G.655) LEAF®

3 Defines cable type.
U = ALTOS® Loose Tube Cable with 2.5 mm buffer tubes

4 Defines outer jacket.
4 = All-dielectric

5 Select fiber placement.
T = 12 fibers/buffer tube (standard)
6 = 6 fibers/buffer tube
See Note 1.

6 Select length markings.
3 = Markings in meters
4 = Markings in feet (standard)

7 Defines tensile strength.
1 = 2700 N/600 lbf (standard)

8 Select performance option code.
30 = 62.5 µm multimode (OM1)
31 = 50 µm multimode (OM2)
80 = 50 µm multimode (OM3)
90 = 50 µm multimode (OM4)
01 = Single-mode (OS2) (Max. attenuation 0.4/0.4/0.3 dB/km)
00 = Single-mode (OS2) (Max. attenuation 0.35/0.35/0.25 dB/km)
22 = Single-mode (OS2) (Max. attenuation 0.34/0.34/0.22 dB/km)
19 = Single-mode (Ultra Low-Loss) (Max. attenuation 0.33/-/0.19 dB/km)
01 = Single-mode NZDSF* (Max. attenuation -/-/0.25 dB/km)
**Non-Zero Dispersion-Shifted Single-mode Fiber*

9 Defines cable type.
D = Gel-free cable

10 Defines special requirements.
20 = No special requirements

1) Cable outer diameter may change. Example: 48 F cable with 6 fibers per tube will require 8 active buffer and have an OD like a standard 96 F cable.



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING