



WSE

White Sands Engineering

A DIVISION OF WESCO DISTRIBUTION, INC.



MINI RG59 CONNECTORS

MINI RG59 75 OHM COAX CONNECTORS, ONE PIECE, FIXED PIN & SPECIALTY

Our MCX connectors are used in headend installations with dual or quad shield cable, and are spec'd in on the Cisco 10K uBR router. Part numbers ending in SL are supplied with a sleeve for use with the ATX MaxNet II combiner.

Part Number	Impedance (ohms)	Cable Retention Force (lbs)	Current Rating (Amps)	Working Voltage (RMS)	RFI (dB)	Cond./Pin Retention (grams)	Finish	Cable Attachment Style
MCXFP	75	40	5	<300	>100	>150	Nickel	Crimp, Plug
MCXFPQ	75	40	5	<300	>100	>150	Nickel	Crimp, Plug Quad
MCXF/FF	75	5	<300	>100	Nickel	MCX to F Jack		
MCXFPSL	75	40	5	<300	>100	>150	Nickel	Crimp, Plug MaxNet
MCXFPQSL	75	40	5	<300	>100	>150	Nickel	Crimp, Plug Quad MaxNet

MCXFP Return Loss

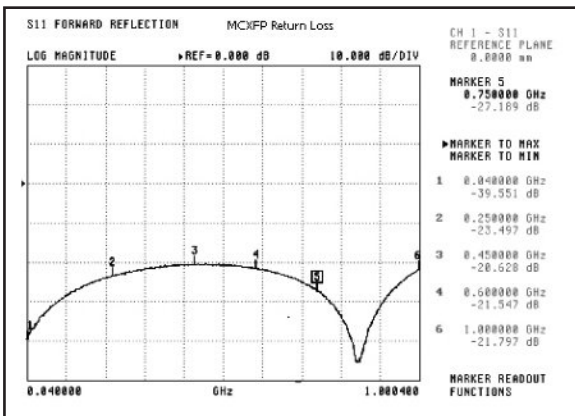

MCXFP



MCXFPSL

HEADEND CONNECTIVITY
 CISCO PRODUCTS
 BROADCAST CONNECTIVITY
 A/V CONNECTIVITY
 ASSEMBLY SERVICES
 TOOLING & ACCESSORIES



WSE SMB and SMZ one piece crimp connectors are used in satellite radio and telco applications. The NMFP is used in testing applications.

Part Number	Impedance (ohms)	Cable Retention Force (lbs)	Current Rating (Amps)	Working Voltage (RMS)	RFI (dB)	Cond./Pin Retention (grams)	Finish	Cable Attachment Style
SMBFP	75	40	5	<300	>100	>150	Nickel	Crimp, Plug
SMBFP90	75	40	5	<300	>100	>150	Nickel	Crimp, Plug 90°
SMBFPF	75	40	5	<300	>100	>150	Nickel	Crimp, Jack
SMZFP	75	40	5	<300	>100	>150	Nickel	Crimp, Plug
NMFP	75	40	5	<300	>100	>150	Nickel	Crimp, Plug



SMBFP & SMBFP90



SMBFPF



SMZFP



NMFP

Not sure what you need?

For more information, contact your local TVC representative at 888-644-6075, or our Applications Engineer, Dan Hamlett at 800-586-7377, x1641 or dhamlett@tvcinc.com.

White Sands Engineering

2202 S. 7th St., Suite 120
Phoenix, AZ 85034



www.whitesandsengineering.com
800.586.7377

