

## Indoor/Outdoor Riser Tight Buffered Cable


Indoor/Outdoor Tight Buffered cables are specified for campus network cabling between buildings where interbuilding lengths are short enough that the installer can recognize savings from the lower costs of terminating tight buffered cables.

For indoor applications the cable is OFNR listed. For outdoor applications the cable is manufactured with an outer jacket that incorporates a UV stabilizer for protection against exposure to the sun plus an anti-fungus protection for use in underground applications.

### Features

- Cables are water blocked and meet water penetration requirements of GR-20-CORE (this helps ensure that any damage to cable is restricted to a repairable length of several meters and minimizes the likelihood of having to replace the entire cable)
- Outer jacket is moisture-resistant, fungus-resistant and UV resistant for outdoor use
- With a riser rating, this cable can be used in all environments: riser, general inside plant and outside plant
- Tested to meet or exceed EIA/TIA 568-A / GR-409-CORE

### Cable Components

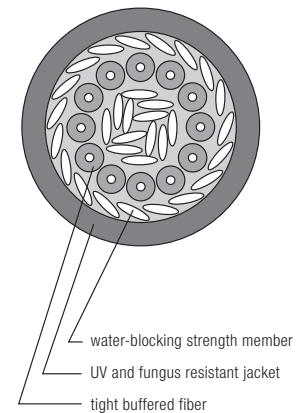

### Mechanical Data

CABLE TYPE	PART NUMBER	FIBER COUNT	NOMINAL DIAMETER	WEIGHT	TENSION		BENDING RADIUS	
					LBS (N)		INCHES (CM)	
					INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
Indoor/Outdoor Riser Tight Buffered Cable	KR002*481001	2	0.19 (4.8)	18 (27)	243 (1082)	121 (541)	3.8 (9.6)	1.9 (4.8)
	KR004*481001	4	0.19 (4.8)	18 (27)	243 (1082)	121 (541)	3.8 (9.6)	1.9 (4.8)
	KR006*591001	6	0.23 (5.9)	22 (33)	243 (1082)	121 (541)	4.6 (11.8)	2.3 (5.9)
	KR008*641001	8	0.25 (6.4)	26 (38)	388 (1726)	194 (863)	5.0 (12.8)	2.5 (6.4)
	KR012*741001	12	0.29 (7.4)	39 (59)	388 (1726)	194 (863)	5.8 (14.8)	2.9 (7.4)
	KR018*821001	18	0.32 (8.2)	50 (75)	398 (1774)	199 (887)	6.4 (16.4)	3.2 (8.2)
	KR024*891001	24	0.35 (8.9)	54 (80)	398 (1774)	199 (887)	7.0 (17.8)	3.5 (8.9)

\* Please specify fiber type when ordering (see below)

- 5 = 50/125µm multimode GIGA-Link™ 600
- 7 = 50/125µm multimode GIGA-Link™ 2000
- 6 = 62.5/125µm multimode GIGA-Link™ 300
- 8 = 62.5/125µm multimode GIGA-Link™ 1000
- 9 = 9/125µm single-mode
- L = 50/125µm multimode Laser-Link 300 for 10 Gigabit Ethernet
- K = Single-mode Futureguide SR-15e Bend Insensitive

Contact Customer Service for special fiber types/performance needs. Standard jacket color is black. Other colors available by request.

### Temperature Specifications

TEMPERATURE RANGE		
OPERATING	INSTALLATION	STORAGE
-40°C to +75°C	-10°C to +70°C	-40°C to +75°C

## Indoor/Outdoor Riser Tight Buffered Cable

### Specifications

CORE SIZE/ FIBER TYPE	MAXIMUM ATTENUATION (dB/km)			OVERFILL LAUNCH MIN. BANDWIDTH (MHz•km)		GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)		10 GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)	
	850nm	1300nm	1550nm	850nm	1300nm	850nm	1300nm	850nm	1300nm
(6) 62.5 Giga-Link™ 300	3.5	1.2	N/A	200	600	300	550	32	—
(8) 62.5 Giga-Link™ 1000	3.5	1.2	N/A	350	600	500	1000	65	—
(5) 50 Giga-Link™ 600	3.5	1.5	N/A	500	500	600	600	82	—
(7) 50 Giga-Link™ 2000	3.5	1.2	N/A	500	800	750	2000	110	—
(L) 50 Laser-Link 300	3.5	1.2	N/A	1500	500	1000	550	300	—
(9) SM	N/A	0.5	0.5	N/A	N/A	N/A	5,000	N/A	10,000
(1) 100/140 Multimode	5.5	3.5	N/A	100	100	N/A	N/A	N/A	N/A
(K) SM Futureguide SR-15e Bend Insensitive	N/A	0.5	0.5	N/A	N/A	N/A	5000	N/A	10,000

### Cable Length - Reel Size

ITEM	REEL A	REEL B	REEL C	REEL D	REEL E
Reel Height (inches)	16	24	30	34	34
Reel Outside Width (inches)	15	17	15.25	21.25	20
Drum Diameter (inches)	8	12	12	12	24
Reel Weight (lbs)	10	23	34	44	48
CAPACITY: meters (feet)					
2 Fiber	1,000 / (3,281)	3,200 / (10,500)	5,000 / (16,404)	—	—
4 Fiber	1,000 / (3,281)	3,200 / (10,500)	5,000 / (16,404)	—	—
6 Fiber	—	2,000 / (6,561)	3,400 / (11,154)	5,000 (16,404)	—
8 Fiber	—	1,700 / (5,577)	4,000 / (9,514)	5,000 (16,404)	—
12 Fiber	—	1,250 / (4,100)	2,100 / ( 6,890)	4,000 (13,123)	—
18 Fiber	—	—	—	—	1,500 (4,921)
24 Fiber	—	—	—	—	1,500 (4,921)