

S123 v2 Fusion Splicers

Hand-Held Clad Alignment Fusion Splicer

NEW




With its low profile and new super rugged body, the FITEL® S123 Version 2 Series Fusion Splicer offers speedy operation for FTTX, LAN, backbone or long-haul installations. The lightweight, durable metal body frame and rubber protection corners provide robust protection, enabling use in challenging locations without compromising splicer performance. The S123 v2 Splicer is water resistant to IPX2 and dust resistant to IP5X.

A large battery capacity makes it possible to perform up to 70 cycles of splicing and heating for the S123C/M4 v2 models with a single battery, and 160 cycles for the S123M8/M12 v2 models with a dual battery configuration.

Combining portability, power flexibility and field ruggedness, the S123 v2 Splicer delivers fast and consistent splicing with outstanding mobility and extreme ease-of-use. It also offers a splice-on-connector (SOC) solution.

 **Friendly**

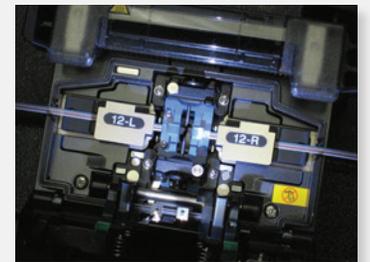

PRODUCT LINE-UP

Model	Application
S123C-A v2	Splicing for single fiber (with soft case)
S123C-B v2	Splicing for single fiber (with hard case)
S123M4-A v2	Splicing for single to 4 ribbon fiber (with soft case)
S123M4-B v2	Splicing for single to 4 ribbon fiber (with hard case)
S123M8 v2	Splicing for single to 8 ribbon fiber
S123M12 v2	Splicing single to 12 ribbon fiber

NEW



Key Features

- **Illumination lamp** lights up a wide area around V-grooves
- **Rugged and compact hand held design** for demanding environmental conditions
- **Fast splice** (13 sec) at low loss and **fast heating** (25 sec) for single fiber¹
- **Simple operation** with fixed V-groove
- Splicer is **compatible** with **Seikoh Giken**² and **Diamond**³ SOC's
- **Internal battery charging**
- **70 cycles** for S123C/M4 V2 models with a single battery, and 160 cycles for S123M8/M12 v2 models with two batteries⁴
- **Available for all METRO/LAN/FTTX fibers** including ultra bend-insensitive fibers (e.g. EZ-Bend® Fiber)
- **Easy maintenance** – Toolless electrode replacement/mirror free alignment system
- **Easy software upgrade** via the Internet
- **Easily exchanged fiber holder systems** (tight holder/fiber holder/SOC holder)
- **PC interface software** to allow user management of splicing programs and results
- **Auto-start** shrink sleeve oven feature
- **Improved GUI** to further enhance ease-of-use
- **Large memory** for storing data (2,000 splice data) and image (100 images)
- **RoHS compliant**

Under Tough Environments

The S123 v2 Fusion Splicer passed manufacturer testing based on criteria below⁵:

- **Drop resistant** – 76 cm drops from 5 different angles
- **Water resistant** – IPX2 rating drip proof⁶
- **Dust resistant** – IP5X rating dust proof⁷



Drop Resistant





Water Resistant



Dust Resistant

Compatible with Spice-on Connectors (SOC)

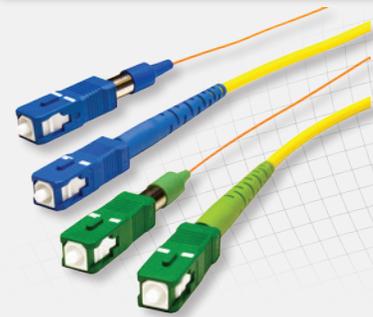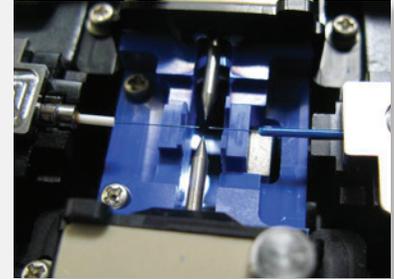

FITEL Splicer SOC Partners



¹ By using semi-auto mode for splicing and pre-heating mode for heating

² Seikoh Giken is a registered trademark of SEIKOH GIKEN CO., LTD

³ Diamond is a registered trademark of Diamond SA

⁴ By using semi-auto mode for splicing and regular mode for heating

⁵ Above tests were performed at the manufacturer's Furukawa Electric Co. Labs, and do not guarantee that the machine will be undamaged under these conditions.

⁶ IPX2 rating drip proof means that the machine can be exposed to 3 mm/min drip from 4 different angles with 15° tilt for 2.5 min each and still functions.

⁷ IP5X rating dust proof means that the machine can be exposed to dust particles with a diameter of 0.1 to 25 µm for 8 hours and still functions.

SPECIFICATIONS

Applicable Fibers	SMF(ITU-T G.652), MMF(ITU-T G.651), DSF(ITU-T G.653), NZDSF(ITU-T G.655), BIF/UBIF (Bend insensitive fiber, ITU-T G.657)
Cladding Diameter	125 μ m
Coating Diameter	250 to 900 μ m for single fiber; 280 to 400 μ m for ribbon (thickness) (S123M4, S124M8, S123M12)
Fibers Cleave Length	5 to 10 mm (S123C); 10 mm (S123M4, S124M8, S123M12)
Average Splice Loss	SM: 0.05 dB, MM: 0.03 dB, DSF: 0.08 dB, NZDSF: 0.08 dB
Splice Time	Single fiber: 13 seconds; Ribbon fiber: 15 seconds
Heat Time	Single fiber: 25 seconds (S922: 40 mm sleeve, S921: 60 mm sleeve) (Preheat mode) ⁷ (S123C, S124M4) Ribbon fiber: 35 seconds (S924: 40 mm sleeve) (Preheat mode) ⁸
Splice Programs	Max. 150
Heat Programs	Max. 18
Automatic Heating Start	Available
Applicable Sleeves	20/40/60 mm
Fiber Holding	Tight holder (Loose tube applicable) or Fiber Holder System (S213C)
Tension Test	Fiber holder system (S123M4, S124M8, S123M12) 1.96 N
Return Loss of Splice	60 dB or more
Fiber Image Magnification	58X (S123C), 48X (S123M4), 28X (S123M8), 20X (S123M12)
Splice Memory	Max. 1500 splices (S123C, S123M4); Max. 1000 splices (S123M8, S123M12)
Image Capture Capacity	Last 100 images to be automatically captured + Up to 24 images to be stored permanently
Dimension	S123, S123M4: 127W \times 199D \times 81H mm (not including shock absorber) 159W \times 231D \times 104H mm (including shock absorber) S123M8, S123M12: 127W \times 199D \times 105H mm (not including shock absorber) 159W \times 231D \times 130H mm (including shock absorber)
Weight	S123C, S123M4: 1.4 kg (without battery), 1.6 kg (with S943B battery) S123M8, S123M12: 1.6 kg (without battery), 2.0 kg (with two S943B batteries)
Monitor	3.5" color LCD monitor
Data Output	USB ver.2.0 mini
Displaying Language	20 languages (e.g. English, Spanish, Japanese, Chinese)
Battery Capacity	Typical 70 splice/heat cycles with S943B battery (S123C, S124M4) ⁹ Typical 160 splice/heat cycles with two S943B batteries (S123M8, S124M12) ¹⁰
Wind Protection	Max. wind velocity of 15 m/s
Operating Temperature	-10 to +50 °C (without excessive humidity)
Storage Temperature	-40 to +60 °C (without excessive humidity)
Power Source	AC Input 100 to 240 V (50/60 Hz), DC Input 11 to 17 V without any change of hardware

⁸ The first heating after turning on the power can be longer than usual heating time

⁹ The number of the splicing and heating cycles the machine can produce using a fully charged battery at room temperature of 20° C, semi-auto mode for splicing and regular mode for heating. Depending on the condition of the batteries and operation environment, the number can vary.

¹⁰ The number of the splicing and heating cycles the machine can produce using two fully charged battery at room temperature of 20° C, semi-auto mode for splicing and regular mode for heating. Depending on the condition of the batteries and operation environment, the number can vary.

STANDARD PACKAGE

Item	P/N	Quantity					
		S123C-A	S123C-B	S123M4-A	S123M4-B	S123M8	S123M12
① S123C v2 Main body	S123-C-A-0001-V2	1	1	—	—	—	—
① S123M4 v2 Main body	S123-M4-A-0003-V2	—	—	1	1	—	—
① S123M8 v2 Main body	S123-M8-A-0003-V2	—	—	—	—	1	—
① S123M12 v2 Main body	S123-M12-A-0003-V2	—	—	—	—	—	1
② Soft Carrying Case	SCC-01	1	—	1	—	—	—
③ Hard Carrying Case	HCC-01	—	—	—	—	1	1
③ Hard Carrying Case	HCC-02	—	1	—	1	—	—
④ Battery Pack	S943B	1	1	1	1	1 or 2	1 or 2
⑤ Spare Electrodes	S969	1	1	1	1	1	1
⑥ AC Adaptor for S123 v2	S976A	1	1	1	1	1	1
⑦ AC Cable Cord	—	1	1	1	1	1	1
⑧ Electrode Sharpener	D5111	1	1	1	1	1	1
⑨ Cleaning Brush	VGC-01	1	1	1	1	1	1
⑩ Fiber Reformer (4)	S122-X-A-0007	—	—	1 pair	1 pair	—	—
⑩ Fiber Reformer (8/12)	S122-X-A-0008	—	—	—	—	1 pair	1 pair
User Manual	—	1	1	1	1	1	1



⑤ Spare Electrodes



⑧ Electrode Sharpener



⑨ Cleaning Brush

⑩ Fiber Reformer

OPTIONAL COMPONENTS

Item	P/N	Quantity
① Soft Carrying Case	SCC-01	1
② Battery Charger	S958C	1
③ AC Adaptor for S958C	S977A	1
④ Cooling Tray	CTX-01	1
⑤ Angled Stand	AGS-01	1
⑥ Working Belt	WBT-01	1
⑦ USB Cable	USB-01	1
⑧ Car Cigarette Cable	CDC-01	1
⑨ Tripod Adaptor	TPA-01	1
⑩ Tight Holder		
16 mm Cleave length	S712T-016	1 pair
10 mm Cleave length	S712T-010	1 pair
⑪ Fiber Holder		
160 μm coated fiber	S712S-160	1 pair
250 μm coated fiber	S712S-250	1 pair
500 μm coated fiber	S712S-500	1 pair
900 μm coated fiber	S712S-900	1 pair
Loose Tube Fiber (left side)	S712S-LT-L	1 pair
Loose Tube Fiber (right side)	S712S-LT-L	1 pair
⑫ SOC Holders		
<For Ferrule>		
Seiko Giken FC/SC connector (9 mm)	S712C-SGS9-L	1
Seiko Giken FC/SC connector (5 mm)	S712C-SGS5-L	1
Seiko Giken LC connector (9 mm)	S712C-SGL9-L	1
Seiko Giken LC connector (5 mm)	S712C-SGL5-L	1
Diamond E-2000/F-3000 connector	S712C-DM25-L	1
<For Cordage>		
Seiko Giken Cordage (5 mm)	S712C-SGC5-R	1
Seiko Giken Cordage (9 mm)	S712C-SGC9-R	1
Diamond Cordage (5 mm)	S712C-DMC5-R	1
<Tool>		
Diamond Mount	WTX-01	1
Smart Fuse		
Software Interface for Machine	SF-01	1



⑤ Angled Stand in Action



⑥ Working Belt in Action



⑥ Working Belt as Shoulder Pack

Ordering Number Form

Code Syntax: S123A-X-Y-V2

Category	Code	Description
X Fiber Holder Type	1	16 mm Tight Holder S712T-016
	2	10 mm Tight Holder S712T-010
	3	Fiber Holder System
Y Number of Battery Packs (S943)	0	Without battery pack
	1*	1 pack
	2*	2 packs

* With 1 S958 battery charger and 1 S977 AC adapter

Contact Us:

Fusion Splicer Customer Service, Training and Service Center

Toll Free: 866-452-9516
 Phone: 678-783-1090
 Fax: 678-783-1093
 Email: splicers@ofsoptics.com

OFS Corporate Headquarters

2000 Northeast Expressway
 Norcross, Georgia 30071, USA
 Toll Free: 888-Fiber-Help
 Intl. Phone: 770-798-5555
 Email: ofs@ofsoptics.com

For additional information please contact your sales representative. You can also visit our website at:

<http://www.ofsoptics.com>.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice.

EZ-Bend is a registered trademark of OFS FITEL, LLC.
 "Bound to Innovate" is a registered trademark of FEC.
 FITEL is a registered trademark of Furukawa Denki Kogyo Kabushiki Kaisha DBA The Furukawa Electric Co., Ltd Corporation.

This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Copyright © 2013 OFS FITEL, LLC.
 All rights reserved, printed in USA.

OFS
 Marketing Communications
 FITEL-S123-0713



Our company has configured the environmental management system at each of our plants worldwide, and acquired ISO 14001 certification.



eFriendly Logo Mark

This logo mark indicates that the products and services satisfy the standards of environmentally friendly products of the Furukawa Electric Group.



Use electronic files, available at:
www.ofsoptics.com - Use less paper.