


Wall Taps and Wall Plates

VersaTap Series

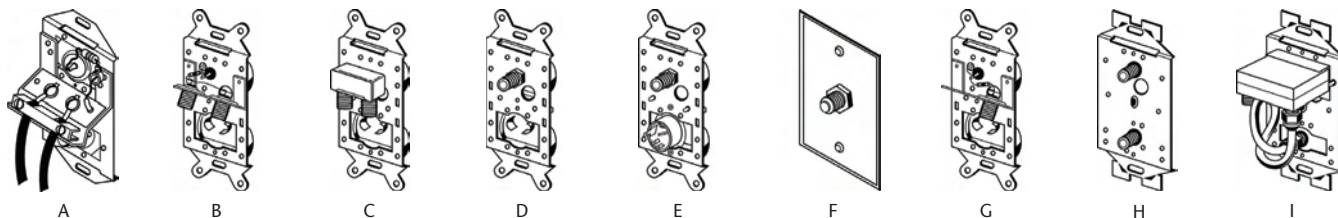

Back Figures

○ Specifications

	V-3186	V-1GF-FT	V-5-FT	V-ST	V-2GF-FT	TF-GF-FT	V-3164
Front Figure:	5	2	1	2	4	6	7
Back Figure:	A	D	E	G	H	F	
Number of Outputs:	1	1	1	1	2	1	
Impedance:	75(TV) 300(FM)	75	75	75	75	75	
Frequency Band:	SUB/VHF UHF/FM	SUB/VHF CATV/UHF	SUB/VHF CATV/UHF	SUB/VHF/UHF	SUB/VHF CATV/UHF	SUB/VHF UHF/CATV/FM	
Connector:	"G/F" Screw	"G/F"***	"G/F"***	Remote Control "G"	"G/F"	"G/F"	
RF Isolation (dB) Available:	0 12 17 23						
Thru Loss (dB)							
SUB:	1.6 1.0 0.5						
VHF:	1.6 1.0 0.5						
UHF:	2.1 1.5 0.9						
Special Characteristics							
Uses DIN Plug #3185			X				
RFI Shielded Circuitry		X	X		X	X	
Other	FM Isolation is 10 dB below TV isolation			Self terminating			Single gang frame with blank filler plate ivory plastic

○ Ordering Information

Model	Stock No.	Description
TF-GF-FT	4691	VersaTap Feed-Thru, Type "GF-81C", 75 Ω
V-1G-B	4772	VersaTap Backmatched, Type "G", 75 Ω, Values: 12, 17, 23 dB
V-1G-VU	4771	VersaTap Type "G", 75 Ω, Values: 17, 23 dB
V-1GF-FT	3187	VersaTap Feed-Thru, Type "GF-81C", 75 Ω
V-2GF-FT	3190	VersaTap Feed-Thru, 2 Type "GF-81C", 75 Ω
V-2WS	3191	VersaTap 2 Type "F", 75 Ω
V-3164	3164	VersaTap Blank Wall Plate
V-3182	3182	VersaTap 1 "G/F" Out, "F" Rear Connections, Values: 12, 17, 23 dB
V-3186	3186	VersaTap 1 "F", 75 Ω, 1-300 Ω FM Terminal, Values: 0, 17, 23 dB
V-3889	3889	VersaTap 1 Tap Output, 75 Ω, Values: 4, 6, 9, 12, 16, 20, 24, 27, 30 dB
V-5-DC	3588	VersaTap 1 Tap Output, 5 Pin DIN, Values: 4, 6, 9, 12, 16, 20, 24, 27, 30 dB
V-ST	3184	VersaTap Self-Terminating, Type "G", 75 Ω

Distribution