


The DH Sectional Antenna With 60" Polar Mount

Motorized Power Declination Available

The same antenna you have used for years now available in sections.

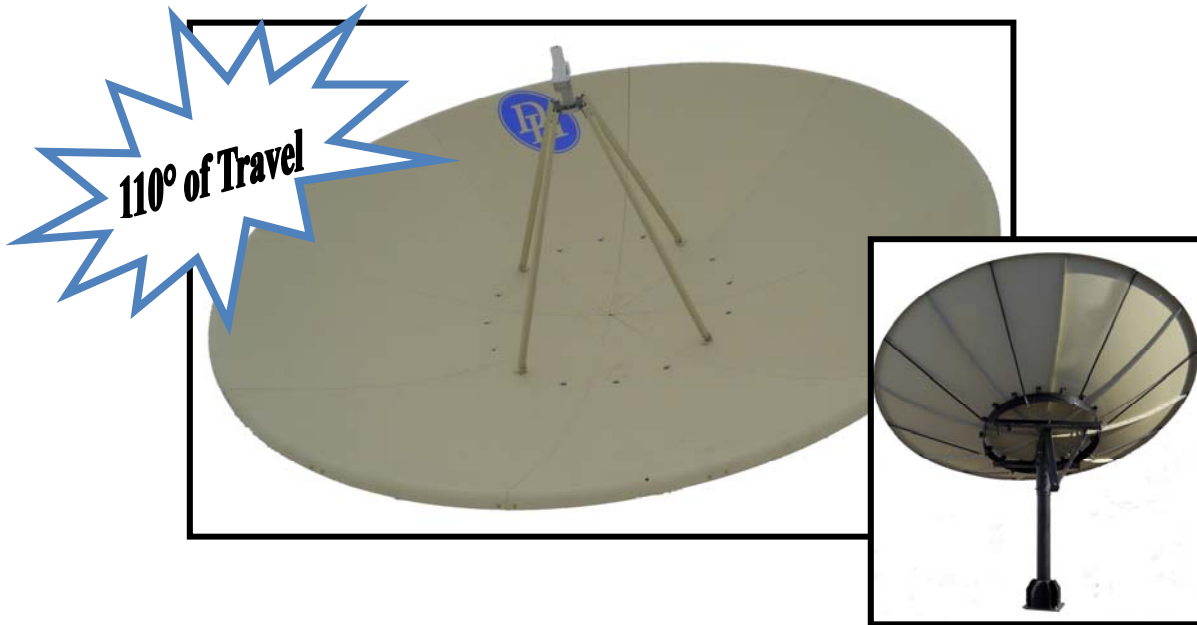

Specifications	3.0m	3.7m	3.8m	4.2m	4.5m	5.0m
Antenna Sections	4	4/Optional 8	4	8	8	8
C Band Gain @ 4 Gig	40.6 db	42.3 db	42.5 db	43.5 db	43.9 db	44.3 db
Ku Band Gain @ 12 Gig	49.9 db	51.1 db	51.8 db	53.0 db	53.3 db	54.2 db
Thickness	.090	.090	.125	.125	.125	.125
f/d Ratio	.3	.4	.378	.34	.33	.3
Wind Force at 60°F at 90 MPH	3,020 lbs	4,200 lbs	4,600 lbs	5,975 lbs	6,600 lbs	7,800 lbs
First Side Lobe (E-Plane)	1.2°	2.4°	2.3°	2.1°	1.95°	1.1°
All Side Lobes	-26 db	-22 db	-22 db	-22 db	-22 db	-22 db
3db Beam Width (E-Plane)	0.5°	1.4°	1.4°	1.2°	1.2°	0.9°
F/L	36"	57.6"	57.6"	57.6"	57.6"	57.6"
Antenna Weight	110 lbs	4 pc-165 lbs, 8 pc-192 lbs	237 lbs	314 lbs	340 lbs	393 lbs
Crate Dims w/Antenna Approximate Weight	62"x40"x66" 254 lbs	76"x36"x78" 4 pc- 348 lbs 77"x47"x58" 8 pc- 500 lbs	79"x36"x81" 464 lbs	91"x38"x64" 544 lbs	92"x54"x67" 688 lbs	99"x52"x72" 741 lbs
Mt Weight	287 lbs	287 lbs	287 lbs	287 lbs	287 lbs	287 lbs
Pallet Dims w/Mount Approximate Weight	64"x64"x33" 335 lbs	64"x64"x33" 335 lbs	64"x64"x33" 335 lbs	64"x64"x33" 335 lbs	64"x64"x33" 335 lbs	64"x64"x33" 335 lbs

With today's innovative technology DH is manufacturing various size sectional antennas that spec the same as a 1pc antenna.

A computer controlled machine is used to manufacture the ribs allowing them to have the exact parabolic curve of the antenna. The generated ribs, also referred to as templates, are secured to the antenna prior to cutting the antenna into sections. The templates allow for the antenna to be re-assembled and perform as a 1pc. Extensive testing has been done on this system and our data **shows no difference** from our 1pc spun test dish. Templates hold the antenna in shape so you are assured of a **perfect antenna** each time.



*Custom crating available

*Dimensions & weights are approximate.

60" Polar Mount Features

- 60" Ring with 16 blocks
- Bronze Bushings at Pivot Points
- 110° of Travel
- 5 1/2" od mast
- 8 Back Braces
- 4 Struts



Satellite

600 N. Marquette Rd.
Prairie du Chien, WI 53821

dhsat@mhtc.net www.dhsatellite.com

Crating available for domestic or ISPM 15 international

(608)-326-8406

1-800-627-9443

Fax (608)-326-4233



Satellite

600 N Marquette Rd.
Prairie du Chien, WI 53821
PH: 1-608-326-8406

DH Test Data

Tested with A1 Turbo S2

103
3220
4.2m
DH Ant

Proof of Performance

Filename : 42NO3220.103H FieldGuide: North American V 1.99
 Date: 09/05/2012 Software: 1.19
 Time: 16:51:39 Model: TURBO S2
 Location: Serial: 1674529
 Technician: LNB Model: LO=5.150 3.4-4.2
 Notes: Region: NE Continental US
 Level: dBm Switch: None

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error MHz Pol	Mod Type	Code Rate	Symbol Rate	Level dbm	IRD SiqQ	C/N db	Eb/No dB	Es/No dB	Lock Status	LNB Volts	LNB mA
B2A1	3760.040	1389.960	-0.035	Err DvbS2	8-3/4I	29999	-28.9	99	15.0	14.5	16.3	LOCK	17.9	210
5 ID	3800.080	1349.920	-0.010	Err DC2	7/8	29270	-27.1	99	14.9	14.4	16.2	LOCK	17.9	210
7	3840.000	1310.000	-0.086	Err Dvb-S	3/4	26681	-27.4	100	15.5	15.0	16.8	LOCK	17.9	210
7	3840.080	1309.920	0.015	Err Dvb-S	3/4	26681	-27.3	100	15.5	15.0	16.8	LOCK	17.9	210
10	3906.576	1243.424	0.014	Err Dvb-S	3/4	6510	-32.2	96	13.4	12.9	14.7	LOCK	17.9	210
11	3915.072	1234.928	0.015	Err Dvb-S	2/3	4410	-32.6	96	13.5	13.0	14.8	LOCK	17.9	210
10	3920.224	1229.776	0.014	Err Dvb-S	5/6	3140	-34.3	91	12.0	11.5	13.3	LOCK	17.9	210
10	3924.224	1225.776	-0.010	Err Dvb-S	5/6	2734	-35.3	95	12.7	12.2	14.0	LOCK	17.9	210
B2B1	3927.508	1222.492	-0.059	Err DvbS2	Q-3/4	2450	-40.3	95	12.8	12.3	14.1	LOCK	17.9	210
K1A1	3960.052	1189.948	-0.007	Err DvbS2	8-5/6	30000	-27.7	99	15.0	14.5	16.3	LOCK	17.9	210
15	4040.068	1109.932	0.015	Err Dvb-S	3/4	26681	-25.4	101	15.9	15.4	17.2	LOCK	17.9	210
17	4040.000	1110.000	-0.073	Err Dvb-S	3/4	26681	-25.3	101	15.8	15.3	17.1	LOCK	17.9	210
G1A1	4073.568	1076.432	0.000	Err Dvb-S	3/4	3000	-33.1	0	0.0	0.0	0.0	Unlock	17.9	210
19	4081.068	1068.932	0.015	Err Dvb-S	3/4	7230	-31.6	97	13.9	13.4	15.2	LOCK	17.9	210
B	4089.952	1060.048	-0.006	Err DvbS2	8-2/3	5923	-33.7	99	15.0	14.8	16.6	LOCK	17.9	210
21	4120.000	1030.000	-0.056	Err DvbS2	8-3/4I	30000	-26.8	99	14.9	14.4	16.2	LOCK	17.9	210
21	4120.044	1029.956	-0.013	Err DvbS2	8-3/4I	30000	-26.7	99	14.9	14.4	16.2	LOCK	17.9	210

Proof of Performance

Filename : 42NO3220.103V FieldGuide: North American V 1.99
 Date: 09/05/2012 Software: 1.19
 Time: 16:51:39 Model: TURBO S2
 Location: Serial: 1674529
 Technician: LNB Model: LO=5.150 3.4-4.2
 Notes: Region: NE Continental US
 Level: dBm Switch: None

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error MHz Pol	Mod Type	Code Rate	Symbol Rate	Level dbm	IRD SiqQ	C/N db	Eb/No dB	Es/No dB	Lock Status	LNB Volts	LNB mA
2	3740.000	1410.000	-0.097	Err Dvb-S	7/8	29270	-26.2	98	14.5	14.0	15.8	LOCK	17.9	210
2	3740.088	1409.912	0.015	Err Dvb-S	7/8	29270	-26.2	98	14.5	14.0	15.8	LOCK	17.9	210
6	3820.000	1330.000	-0.093	Err DC2	3/4	29270	-25.5	100	17.4	16.9	18.7	LOCK	17.9	210
6 ID	3820.084	1329.916	0.014	Err DC2	3/4	29270	-25.3	100	17.3	16.8	18.6	LOCK	17.9	210
8	3860.068	1289.932	-0.004	Err DvbS2	8-5/6	30000	-27.9	100	15.4	14.9	16.7	LOCK	17.9	210
B2D1	3891.044	1258.956	-0.029	Err DvbS2	8-2/3	9092	-34.8	100	15.5	15.0	16.8	LOCK	17.9	210
B2E1	3913.544	1236.456	0.000	Err Dvb-S	6400	456	0.0	0.0	0.0	0.0	0.0	Unlock	17.9	210
12	3940.076	1209.924	-0.010	Err DC2	7/8	29270	-25.0	100	15.6	15.1	16.9	LOCK	17.9	210
13	3980.076	1169.924	0.015	Err Dvb-S	7/8	26666	-24.9	100	17.3	16.8	18.6	LOCK	17.9	210
18	4060.072	1089.928	0.000	Err DC2	29270	356	0.0	0.0	0.0	0.0	0.0	Unlock	17.9	210
20	4091.068	1058.932	0.015	Err Dvb-S	3/4	14035	-29.9	98	14.4	13.9	15.7	LOCK	17.9	210
B2I1	4109.044	1040.956	-0.032	Err Dvb-S	3/4	14029	-31.3	96	13.5	13.0	14.8	LOCK	17.9	210
24	4196.064	953.936	0.014	Err Dvb-S	2/3	2894	-34.0	100	16.8	16.3	18.1	LOCK	17.9	210

103
3220
4.5m
DH Ant

Proof of Performance

Filename : 453220.103HMD FieldGuide: North American V 1.99
 Date: 09/07/2012 Software: 1.19
 Time: 13:45:06 Model: TURBO S2
 Location: Serial: 1674529
 Technician: LNB Model: LO=5.150 3.4-4.2
 Notes: Region: NE Continental US
 Level: dBm Switch: None

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error MHz Pol	Mod Type	Code Rate	Symbol Rate	Level dbm	IRD SiqQ	C/N db	Eb/No dB	Es/No dB	Lock Status	LNB Volts	LNB mA
B2A1	3760.040	1389.960	-0.037	Err DvbS2	8-3/4I	29999	-28.1	101	15.8	15.3	17.1	LOCK	17.9	210
5 ID	3800.080	1349.920	-0.011	Err DC2	7/8	29270	-26.1	100	15.5	15.0	16.8	LOCK	17.9	210
7	3840.000	1310.000	-0.087	Err Dvb-S	3/4	26681	-26.0	100	16.6	16.1	17.9	LOCK	17.9	210
7	3840.080	1309.920	0.014	Err Dvb-S	3/4	26681	-26.0	100	16.7	16.2	18.0	LOCK	17.9	210
10	3906.576	1243.424	0.015	Err Dvb-S	3/4	6510	-30.7	97	14.0	13.5	15.3	LOCK	17.9	210
11	3915.072	1234.928	0.014	Err Dvb-S	2/3	4410	-31.6	96	13.4	12.9	14.7	LOCK	17.9	210
10	3920.224	1229.776	0.015	Err Dvb-S	5/6	3140	-33.0	94	12.6	12.1	13.9	LOCK	17.9	210
10	3924.224	1225.776	-0.011	Err Dvb-S	5/6	2734	-33.6	96	13.6	13.1	14.9	LOCK	17.9	210
B2B1	3927.508	1222.492	-0.061	Err DvbS2	Q-3/4	2450	-39.1	97	14.0	13.5	15.3	LOCK	17.9	210
K1A1	3960.052	1189.948	-0.013	Err DvbS2	8-5/6	30000	-27.4	100	15.5	15.0	16.8	LOCK	17.9	210
15	4040.068	1109.932	0.014	Err Dvb-S	3/4	26681	-24.3	100	16.8	16.3	18.1	LOCK	17.9	210
17	4040.000	1110.000	-0.075	Err Dvb-S	3/4	26681	-24.3	100	16.8	16.3	18.1	LOCK	17.9	210
G1A1	4073.568	1076.432	0.000	Err Dvb-S	3000	381	0.0	0.0	0.0	0.0	0.0	Unlock	17.9	210
19	4081.068	1068.932	0.014	Err Dvb-S	3/4	7230	-31.4	98	14.4	13.9	15.7	LOCK	17.9	210
B	4089.952	1060.048	-0.007	Err DvbS2	8-2/3	5923	-33.3	99	15.2	14.7	16.5	LOCK	17.9	210
21	4120.000	1030.000	-0.057	Err DvbS2	8-3/4I	30000	-25.6	100	15.6	15.1	16.9	LOCK	17.9	210
21	4120.044	1029.956	-0.012	Err DvbS2	8-3/4I	30000	-25.6	100	15.7	15.2	17.0	LOCK	17.9	210

Proof of Performance

Filename : 453D0.103VMD FieldGuide: North American V 1.99
 Date: 09/07/2012 Software: 1.19
 Time: 13:45:06 Model: TURBO S2
 Location: Serial: 1674529
 Technician: LNB Model: LO=5.150 3.4-4.2
 Notes: Region: NE Continental US
 Level: dBm Switch: None

Satellite: 103.0 West / AMC1

Tran	Dnlink MHz	Freq MHz	Error MHz Pol	Mod Type	Code Rate	Symbol Rate	Level dbm	IRD SiqQ	C/N db	Eb/No dB	Es/No dB	Lock Status	LNB Volts	LNB mA
2	3740.000	1410.000	-0.100	Err Dvb-S	7/8	29270	-25.4	97	14.1	13.6	15.4	LOCK	17.9	210
2	3740.088	1409.912	-0.012	Err Dvb-S	7/8	29270	-25.5	97	14.1	13.6	15.4	LOCK	17.9	210
6	3820.000	1330.000	-0.095	Err DC2	3/4	29270	-24.8	100	17.6	17.1	18.9	LOCK	17.9	210
6 ID	3820.084	1329.916	-0.012	Err DC2	3/4	29270	-24.9	100	17.6	17.1	18.9	LOCK	17.9	210
8	3860.068	1289.932	-0.013	Err DvbS2	8-5/6	30000	-27.9	100	15.7	15.2	17.0	LOCK	17.9	210
B2D1	3891.044	1258.956	-0.031	Err DvbS2	8-2/3	9092	-34.6	100	16.4	15.9	17.7	LOCK	17.9	210
B2E1	3913.544	1236.456	0.000	Err Dvb-S	6400	456	-33.6	0.0	0.0	0.0	0.0	Unlock	17.9	210
12	3940.076	1209.924	-0.012	Err DC2	7/8	29270	-24.5	100	15.4	14.9	16.7	LOCK	17.9	210
13	3980.076	1169.924	-0.010	Err Dvb-S	7/8	26666	-24.1	100	17.7	17.2	19.0	LOCK	17.9	210
18	4060.072	1089.928	0.000	Err DC2	29270	348	0.0	0.0	0.0	0.0	0.0	Unlock	17.9	210
20	4091.068	1058.932	-0.011	Err Dvb-S	3/4	14035	-28.6	100	15.7	15.2	17.0	LOCK	17.9	210
B2I1	4109.044	1040.956	0.000	Err Dvb-S	14029	393	0.0	0.0	0.0	0.0	0.0	Unlock	17.9	210
24	4196.064	953.936	0.014	Err Dvb-S	2/3	2894	-34.6	100	16.8	16.3	18.1	LOCK	17.9	210