

2.4M C & Ku-Band Rx/Tx Antenna

Series 1240

Technical Specifications

Electrical		C-Band Linear	C-Band Circular	Ku-Band
Antenna Size		2.4M (96 in.)	2.4M (96 in.)	2.4M (96 in.)
Operating Frequency (GHz)	Receive	3.625 - 4.20 GHz	3.625 - 4.20 GHz	10.70 - 12.75 GHz
	Transmit	5.85 - 6.425 GHz	5.85 - 6.425 GHz	13.75 - 14.50 GHz
Antenna Gain at Midband, dBi ($\pm .2$ dB)	Receive	38.20 dBi	38.20 dBi	47.40 dBi
	Transmit	42.20 dBi	42.20 dBi	49.20 dBi
VSWR		1.3:1 Max	1.3:1 Max	Rx: 1.5:1 Max Tx: 1.3:1 Max
Pattern Beamwidth (in degrees at midband)	-3 dB	Rx: 2.20° Tx: 1.40°	Rx: 2.20° Tx: 1.40°	Rx: 0.70° Tx: 0.60°
	-15 dB	Rx: 4.90° Tx: 3.10°	Rx: 4.90° Tx: 3.10°	Rx: 1.60° Tx: 1.40°
Sidelobe Envelope, Co-Pol (dBi) 100 λ / D < $\theta \leq 20^\circ$ 20° < $\theta \leq 26.3^\circ$ 26.3° < $\theta \leq 48^\circ$ $\theta > 48^\circ$		29 - 25 Log θ dBi -3.5 dBi 32 - 25 Log θ dBi -10 dBi (averaged)	29 - 25 Log θ dBi -3.5 dBi 32 - 25 Log θ dBi -10 dBi (averaged)	29 - 25 Log θ dBi -3.5 dBi 32 - 25 Log θ dBi -10 dBi (averaged)
Antenna Noise Temperature				
10° Elevation		52 K	57 K	85 K
20° Elevation		46 K	49 K	78 K
30° Elevation		45 K	45 K	73 K
40° Elevation		44 K	45 K	70 K
Cross Polarization Isolation (Linear) On Axis	Receive	>30 dB	N/A	>30 dB
	Transmit	>30 dB	N/A	>35 dB
Axial Ratio (Circular)	Receive	N/A	2.28 dB	N/A
	Transmit	N/A	1.94 dB	N/A
Feed Interface	Receive	CPR 229F	CPR 229F	WR 75 or Direct Radio
	Transmit	CPR 137 or Type N	CPR 137 or Type N	Mounting
Maximum Radio Weight (Optional Feed Stabilizer available for higher radio weight)		20 Lbs. (9 Kg.)	20 Lbs. (9 Kg.)	12 Lbs. (5.5 Kg.)

Mechanical

Reflector Material	Glass Fiber Reinforced Polyester SMC
Antenna Optics	Prime Focus, Offset Feed, Four-piece
Mast Pipe Size	6" SCH 40 Pipe (6.63" OD) 16.83 cm.
Elevation Adjustment Range	5° to 90° Continuous Fine Adjustment
Azimuth Adjustment Range	360° Continuous, +/- 5° Fine Adjustment
Mount Type	Elevation over Azimuth
Shipping Specifications	
Shipping Weight (Total):	525 lbs. (237 kg.)
Install (Net) Weight:	345 lbs. (157 kg.)

Environmental Performance


Wind Loading	Operational Survival	50 mph (80 km/h) 125 mph (201 km/h)
Temperature Range (operational)		-40° to 140°F (-40° to 60°C)
Rain (operational)		1/2" (13mm) / hr
Atmospheric Conditions		Salt, Pollutants and Contaminants as Encountered in Coastal and Industrial Areas
Relative Humidity		0 to 100% With Condensation
Solar Radiation		360 BTU/h/ft ²

GENERAL DYNAMICS SATCOM Technologies

1500 Prodelin Drive • Newton, NC 28658 USA • Telephone: +1-828-464-4141 • Fax: +1-828-464-4147
Email: vsat@gdsatcom.com • Web Site: www.gdsatcom.com

1000-062 Rev. 08/12

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

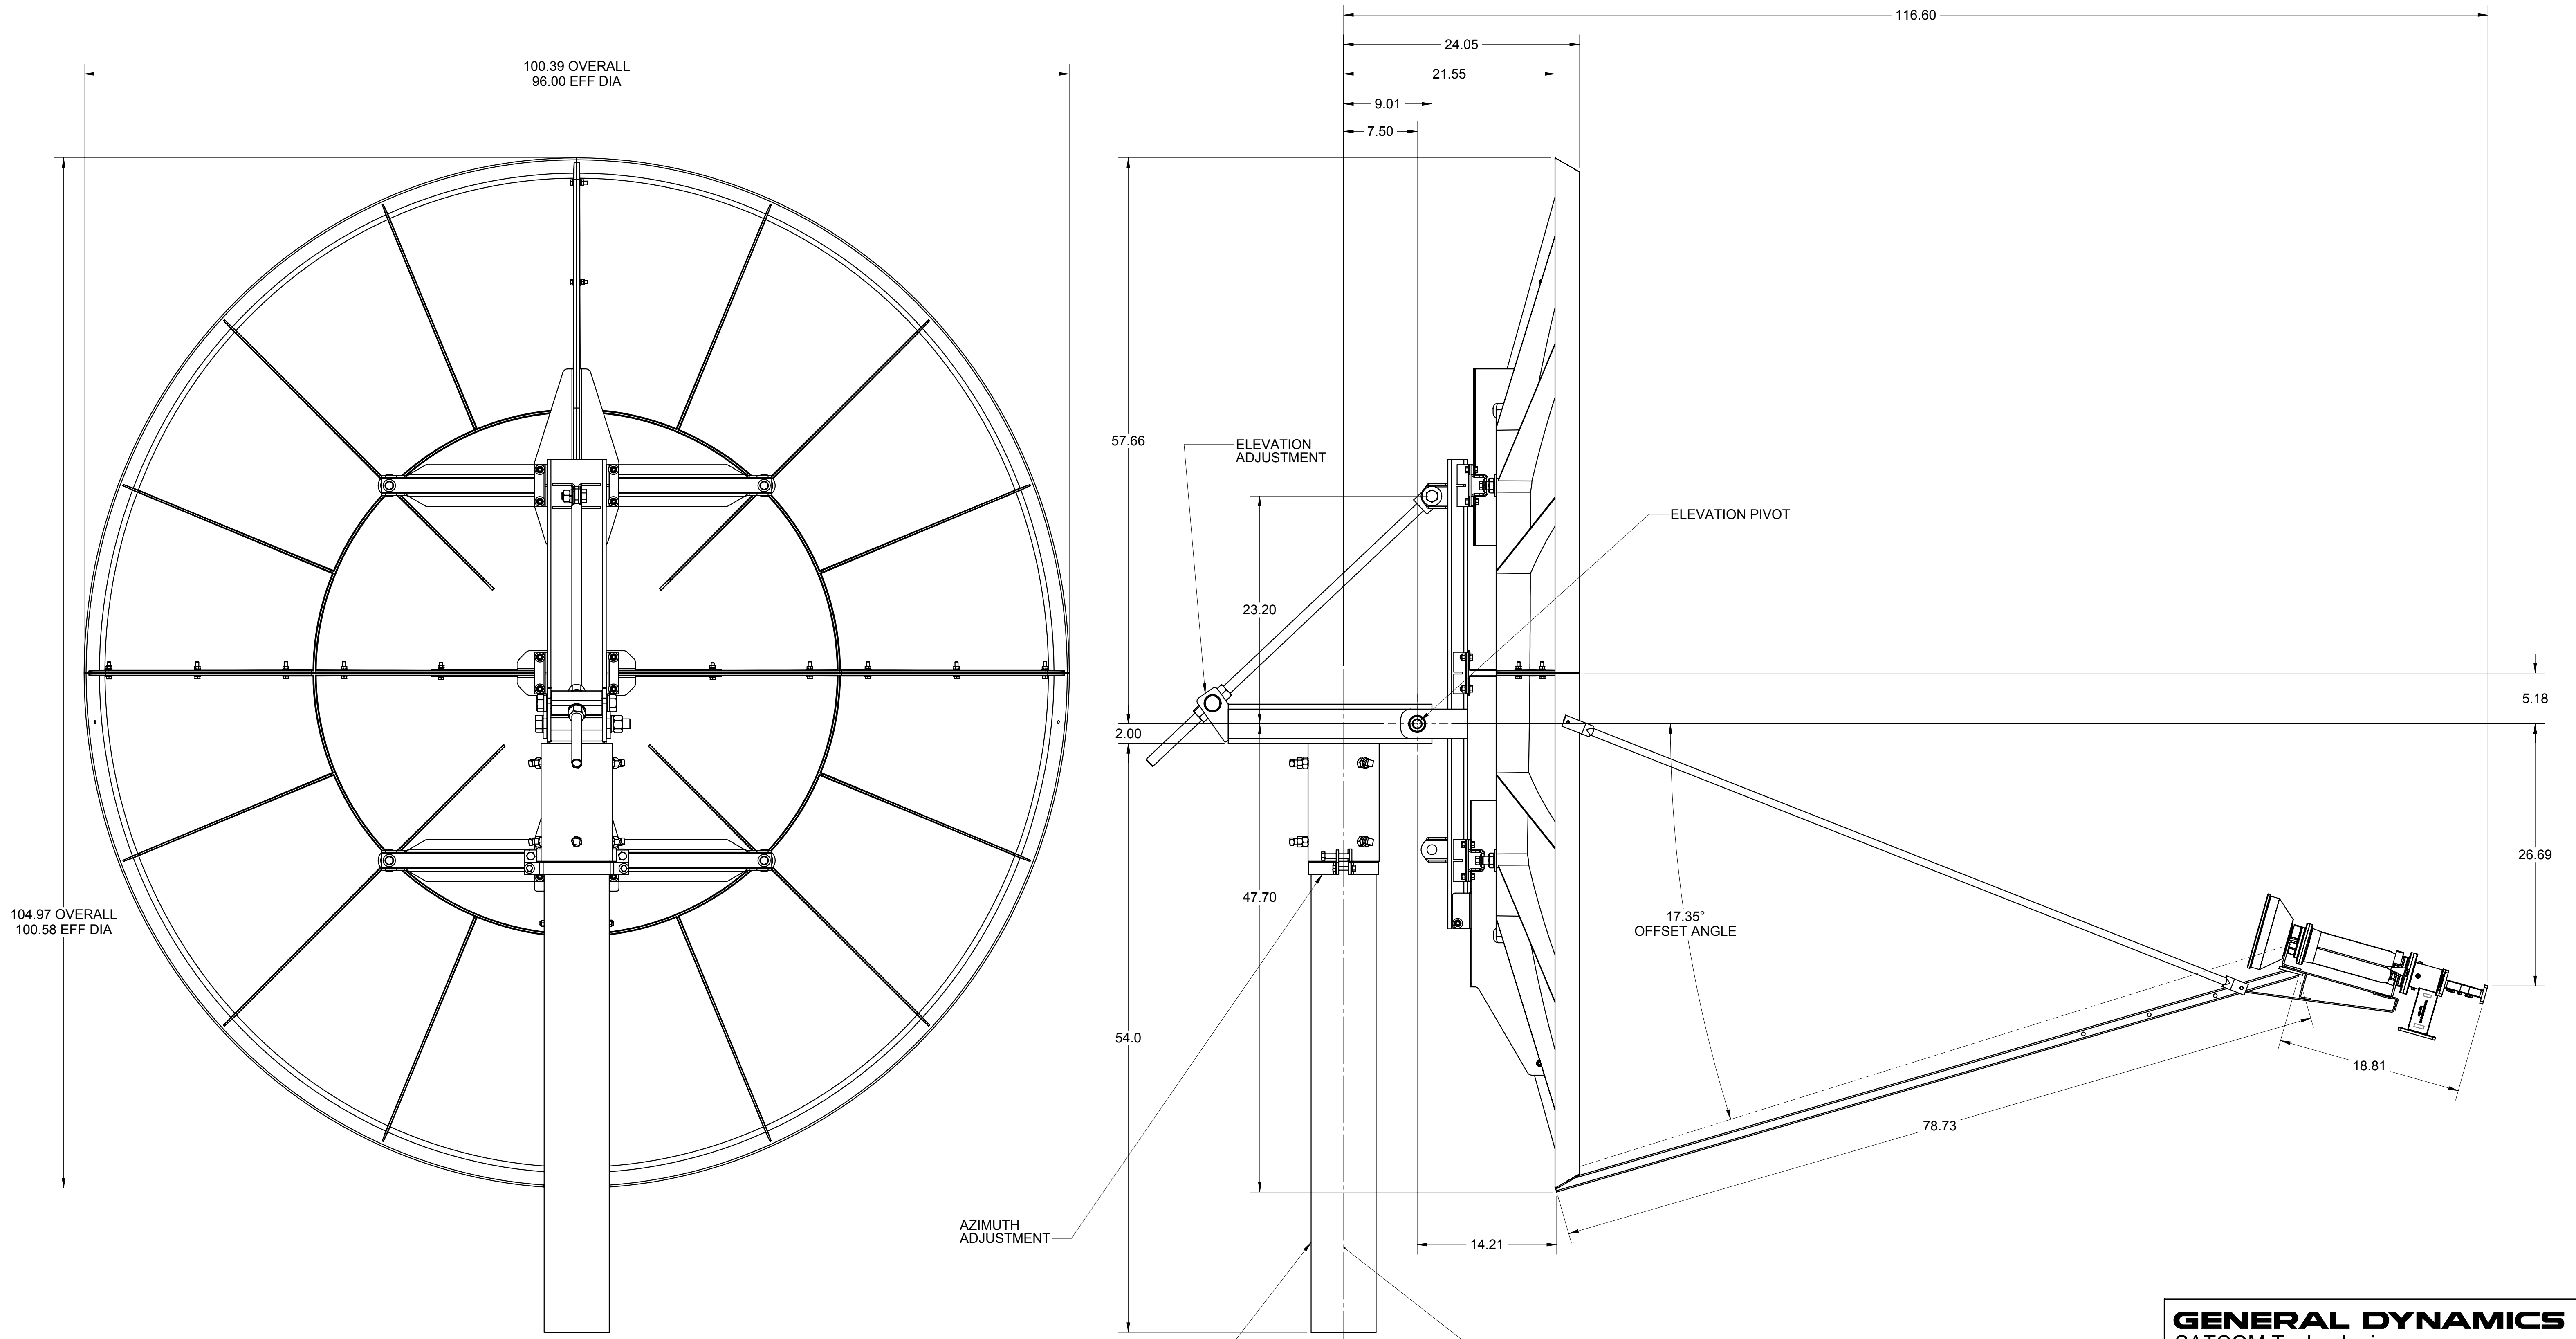

DIMENSIONS ARE IN DECIMAL INCHES, UNLESS OTHERWISE NOTED.
 TOLERANCES ON FINISHED DIMENSIONS ARE AS FOLLOWS:
 X.X = 0.1 X.XXX = 0.010
 X.XX = 0.05 ANGULAR = 1°

Prodelin's drawings, sketches, computer programs, plans, specifications, technical data, prototype products, blueprints, photographs, instructions, diagrams, models, formulae, tables, engineering designs, diskettes, tapes, software, other electronic media (defined to include, but not be limited to, the system functional design, logic flow, algorithms, application programs, operating systems, software design implementation, tests, test results, operation, diagnosis, repair, ...) and/or documents (collectively "Proprietary Materials") are confidential and proprietary in nature and are considered by it to constitute "Trade Secrets" as defined by N.C. Gen. Stat. 66-152 (3)(a) and (b) of the North Carolina Uniform Trade Secrets Act, by the Uniform Trade Secrets Act and by any other states/countries' Trade Secrets Acts regardless if some of the information or documents that were incorporated into such drawings, sketches, computer programs, plans, specifications, technical data, prototype products, blueprints, photographs, instructions, diagrams, models, formulae, tables, engineering designs, diskettes, tapes, software, other electronic media (defined to include, but not be limited to, the system functional design, logic flow, algorithms, application programs, operating systems, software design, implementation, tests, test results, operation, diagnosis, repair, ...) and/or documents or the information that was incorporated into the Proprietary Materials came from a customer or third party and whether such Proprietary Materials do or do not constitute intellectual property, patent, trademark or copyright rights or material. THESE "PROPRIETARY MATERIALS" MAY NOT BE COPIED, REPRODUCED, DISCLOSED OR DISTRIBUTED IN WHOLE OR IN PART TO OTHER PARTIES EITHER VERBALLY OR IN WRITING WITHOUT PRIOR WRITTEN APPROVAL BEING OBTAINED FROM THE PRODELIN DOCUMENTATION SUPERVISOR OR A DULY AUTHORIZED REPRESENTATIVE.

GENERAL DYNAMICS
 SATCOM Technologies

TITLE
2.4M SERIES 1240 ANTENNA SYSTEM GEOMETRY

MATERIAL	SEE NOTE	FINISH	SEE NOTE
NEXT ASS'Y		CODE IDENT. NO.	94661
DRAWN	4/9/12 BY JWJ	TD0665	REV.
CHECKED	BY		
ENGR.	BY		
MFG APVD	BY	SCALE 1:8	SH. 1 OF 1